







CLOSER EXTRACTION FROM COOKING SMOKE



CLOSER EXTRACTION

Only **325mm** from the stove - almost half the distance of a traditional range hood, the FOTILE X-Series captures cooking smoke straight at the source.



WIDE SUCTION PLATE

Its **900mm-wide** suction plate intercepts cooking smoke and extracts it before it spreads.

STRONGER BRUSHLESS DIRECT-CURRENT INVERTER (BLDC)

MORE POWERFUL, BETTER EFFICIENCY

The BLDC motor uses Microchip Technology along with field-oriented (FOC) algorithm boosts maximum static pressure up to **1480Pa** with an unrestrained airflow of **2800m3/h** to remove cooking smoke while keeping noise level as low as **39dB**.

SMART SYNC

Upon gas hob ignition, range hood automatically turns on the to remove cooking smoke.

Needs to be paired with FOTILE's Gas Hob that has sync feature.





FASTER COOKING SMOKE HIGHWAY

REAR EXTRACTION DESIGN

The rear extraction design allows the extraction motor to rotate 180°, actively reducing the distance of cooking smoke and extracting it in a straight path.

PATENTED NAUTILUS AIR PASSAGEWAY

Reduces wind resistance and noise. With the 3-point Extraction System, cooking smoke is collected, extracted and removed in a single uninterrupted path. Patent No. 01132056.7

SMARTER AIR DISTRIBUTION

INTELLIGENT AIR DISTRIBUTION

With a touch of a button, the FOTILE X-Series can **focus its extraction power** to either side of the hood.



STRONGER EXTRACTION POWER

Divert extraction power up to **70%** on either side of the hood.



HIGHER AIR PRESSURE

Increase air pressure for another **50%** on either side of the hood.

SMART SMOTION

(Smoke + Motion) Detection

Turn the hood on and off with the

wave of a hand.

EASY TO CLEAN

All-new filter-free design with glass frame, just wipe to restore it to its original lustre.

LOW NOISE LEVEL

BLDC motor with multiple noise-reduction technologies. Noise level produced is as low as **39dB**.

Where Eastern Innovation Meets Western Elegance Powerful Suction | Turbo Vent | Sleek Design





DOUBLE POWER SYSTEM

AUTO TURBO STYSTEM

Increase extraction power automatically when resistance is detected.

BRUSHLESS DIRECT-CURRENT INVERTER (BLDC)

Doubling extraction power by achieving air pressure up to 1140Pa with an unrestrained airflow of 2,450m3/h, keeping noise level as low as 40dB. Available in range model ZMG9057

INTELLIGENT SUCTION & EXTRACTION SYSTEM

DELAY OFF TIMER

Hood will run for **2 minutes** to extract the remaining cooking smoke in your kitchen.

SMART SMOTION (SMOKE + MOTION) DETECTION

Turn the hood on and off with the wave of hand.

INTELLIGENT AIR MANAGEMENT

Ventilates harmful gases in the kitchen automatically to keep the kitchen

Air Condition	Good	Poor	Severe	
Fan Speed	(<u>{</u>) off	(S) Medium	(S) Strong	

SPACIOUS ENTRY CAVITY



OPTIMAL COOKING SMOKE CONTROL ZONE

Only **560mm** from the stove. Fully trap cooking smoke before it starts to spread.



WIDER CHAMBER ENTRANCE

900mm wide chamber and a 415mm depth distance buffer plate contain the spread of your cooking smoke in a confined area.

HIGHWAY FOR COOKING SMOKE



DIRECT-FLOW SYSTEM

Leads cooking smoke from chamber entrance to exhaust in one straight line with zero to minimal obstruction.



3-STAGE VERTICAL ACCELERATION


Let cooking smoke travels easily through smoke chamber.

SMART SYNC



Upon gas hob ignition, range hood automatically turns on the to remove cooking smoke.

Needs to be paired with FOTILE's Gas Hob that has sync feature.

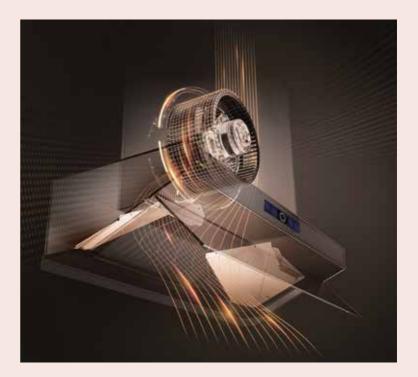

NVH TECHNOLOGY

Uses BLDC motor, vibration dampers, sound-absorbing cotton, a bionic wing impeller, and other specialized components—to reduce noise, vibration, and harshness, achieving a quiet noise level of 40dB.

ELEGANT DESIGN

325mm ultra-slim hood design with elegant black tempered glass perfectly matches any cabinet.

EASY TO CLEAN

Dual removeable grille filter for easy attachment and detachment when necessary.

EPS-I SERIES Smart SYNC, Smart Flame **GAS HOB**



SMART SYNC

FLAMES IN, SMOKE OUT

Sync gas hob with range hood. Upon gas hob ignition, range hood automatically turns on the to remove cooking smoke.

Hood-hob sync needs to be paired with FOTILE's range hood that has sync feature. Available in hob model GEG88201.



SMART FLAME

7+N ADJUSTABLE FLAME LEVELS

Easy to identify flame levels from keeping food warm or stir-fry cooking.

5.35KW HIGH FLAME POWER

From lowest 0.28kW to 5.35kW high flame power. More than 60% heating efficiency for optimum level of flame for fast cooking with low gas consumption.




SMART TIMER

ACCURACY GUARANTEED

180-min timer. Constant monitoring is no longer needed. It automatically turn off the fire at desired time, eliminating the chaos in the cooking process.

Available in hob model GEG88201.





EFFICIENT HEATING

REDUCE TIME CONSUMPTION BY 13.5% SAVE GAS CONSUMPTION BY 15%

According to lab test result on boiling 1kg of water to 95°C by comparing EPS-i burner to other burners.

ADJUSTABLE CUT-OUT SIZE

EASY INSTALLATION

With a customizable range of 700-840 (w) x 400-480mm (d), changing your hob is much easier.

SAFETY WITH FULL PROTECTION

Auto cut-off gas for continuous cooking up to 4 hours. Available in hob model GEG88201. 4-layer explosion proof panel and 12 safety features to safeguard you and your family.

INSTANT IGNITION

FOTILE EPS-i is built for instant ignition, giving you roaring flames the moment you demand it.

FROM STEWING TO STIR-FRYING, THE EPS-I BURNER CAN DO IT



Stewing



Simmering



Boiling



Stir-Frying



Deep-Frying

0.28kW

5.35kW

More Than High Flame Power SUPERFLAME SERIES GAS HOB



POWERFUL HEAT

5.0kW heating load, **60%** heating efficiency. Powerful and fast cooking.

SAFE COOKING EXPERIENCE

12 safety features for a safer cooking experience.

STABLE PAN SUPPORT

Stable flames. Stable pan support to hold the wok.

DURABLE AGAINST RUST

High-Quality Aluminium Alloy burner, long lasting and durable against rust.

FAST IGNITION

O-second ignition with fast ignition feature.

SAVE GAS CONSUMPTION

60% heating efficiency, saves 20% on gas consumption.

SMART SYNC

Sync gas hob with range hood. Upon gas hob ignition, range hood automatically turns on the to remove cooking smoke.

Hood-hob sync needs to be paired with FOTILE's range hood that has sync feature. Available in hob model GHG78221-i.



6 CORE TECHNOLOGIES



Pressure-stable pre-mixing chamber.



Large flame hole.



U5-balanced direct injection chamber.



Oxygen augmenting fire cap.



Oxygen supplementation channel.



Double-stabilized flame ring.

ADJUSTABLE CUT-OUT SIZE

Easy Installation

Say hello to FOTILE Super Flame's adjustable cut-out size. FOTILE Super Flame makes it easy for any family in home to make change.

PAN SUPPORT

Thoughtfully Stable

The FOTILE Super Flame's 165mm pan support is designed to securely hold classic Southeast Asian sharp-bottomed woks, providing enhanced stability and an extra layer of safety.


INSTANT IGNITION

Unlike typical gas hobs require you to press the ignition for a relatively long time, FOTILE Super Flame is built for instant ignition, giving you roaring flames the moment you demand it.

VITRO CERAMIC The Most Powerful In Its Class HOB

MAXIMUM EFFICIENCY

Lower energy consumption and less heat loss for shorter cooking time and maximum efficiency. The hob is able to reach 598°C in just 4 minutes. Energy consumption from as low as RMO.22kWh**



- * FOTILE National Standard Lab Testing Result
- **Based on current TNB tariff rate for residential usage & depending on individual household electricity consumption.

GERMAN QUALITY



SCHOTT CERAN GLASS & E.G.O. HEATING COIL German-made SCHOTT CERAN glass and E.G.O heating coil.

TOP-NOTCH SAFETY



Digital timer, child lock, overheating protection, safety off switch and high heat indicator.





INDUCTION HOB

For A Faster and Safer Cooking Experience



REMOVABLE MAGNETIC KNOB

Operate with just a twist of knob. Lift the knob to pause the hob.

TOP-NOTCH SAFETY



DIGITAL TIMER

Timer up to 99 mins.



STANDBY MODE

Lift the knob to pause the hob.



CHILD LOCK

Lock all buttons in the operational area.



SAFETY SWITCH OFF

Automatically switch off the hob if left idle for 2 hours.



HIGH HEAT INDICATOR

When surface temperature more than 55°C.



OVERHEATING PROTECTION

Shut down if pot dries up and temperature goes above 250°C.



POT DETECTION

After burner heats up and no pans are in its place, it will shut down the appliances after 1 minute.



OVERHEATING PREVENTION

Lower power level to 300W for 1 minute if temperature reach 120°C within 30 sec.

A Baking Good Time For The Family









ACCURATE TEMPERATURE CONTROL



Ensure that your food is baked evenly. Say goodbye to unstable temperatures and half-cooked meals!

70L LARGE CAPACITY



Size matters! Bake food of all shapes and sizes effortlessly with the oven's 70L capacity and 5-layer side rack.



HUMANIZED DESIGN

BEGINNER FRIENDLY

Create a variety of delicious flavours with our Easy Tips. (Applicable for oven model KSG7003AT & KSG7007AI

OVERSIZED WINDOW

Ultra-large window provides a clear view of the baking area.

DAMPING HINGE

Allows the door to be stopped and stay balanced at any angle. (Applicable for oven model KSG7003AT & KSS7002A)

ANTI-SPILL GRILL

Enable the grill to be balanced perfectly for increased safety.

USER-FRIENDLY

3-simple steps to operate the oven.

STEAM OVEN Cooks Healthy and Delicious Meals For Your Family


FAST HEATING

LARGE HEATING PLATE DIAMETER

Dual heating tube spiral distributer for increasing power and rapid temperature rise.

PRESERVES FOOD NUTRITIONS

100% steam heating technology retains more nutrients of your food.



8 PRESET STEAM PROGRAMS

Experience hassle-free cooking with 8 automatic preset programs.

EVEN HEATING



By placing the steam inlet at the centre of the back cavity, the steam flows upwards and downwards throughout the whole oven, allowing even heating of food in the upper and lower layers of the oven.

MULTI-LEVEL COOKING

DYNAMIC BALANCE SYSTEM

Multi-level cooking is also possible with 3 separate shelves. This technology prevents mixing of different tastes from foods on different shelves. It also recirculates the steam to save water.



THOUGHTFULLY DESIGNED



8 INSTANT COOKING MENUS

Experience hassle-free cooking with 8 automatic menus.



SAFETY LOCK

Security function created especially for families with children.



3 AUTO-DEFROST FUNCTIONS

Defrost various foods.



MICROWAVE OVEN

Heats Up A Variety of Food Instantly

COOKED TO PERFECTION

MICROWAVE AND LIGHT WAVE HEATING SYSTEMS

Whether it is the microwaving mode, light wave heating mode or even both at the same time, you can now enjoy a more efficient way of cooking.

HASSLE-FREE SOLUTION

INDEPENDENT VENTILATION

Discharges hot air from its front panel and cooking components to maximize their functions and prolong the lifespan. Oven can be directly built in without the hassle of having ventilation outlets built on the cabinet.



FLATBED MICROWAVE

(Applicable to microwave oven model HW25800P-C2T)







Cleaning with just a wipe. Makes cleaning quicker and easier.



One For All, All at Once COMBIOVEN



STEAM-BAKE SMART COMBO

Steam and bake functions at the same time. Users can bake and steam food without being limited by sequential processes.

*This function offers to P50-52 preset menu only.

MULTILAYER COOKING

Simultaneously steam or bake multiple food at once. Easy to prepare meals for a family gathering, special occasions, or simply when batch cooking for the week.

- STEAM

4 STEAMING FUNCTIONS - LOW, NORMAL, HIGH, **MULTI-LAYER STEAM**

Low steam of temperature as low as 30 °C to high steam with temperature up to 120 °C. Powerful steam generated in just 50s.

DYNAMIC STEAM BALANCED TECHNOLOGY

Ensure fresh steam supply and preserves the taste of your food.

- BAKING

10 BAKING MODES

- Full Convection Up Down Grill
- Steam Bake
- Multi Bake

- Convection
- Pizza
- Broil

• Eco Bake • 3D Grill

UNIFORM TEMPERATURE

Ensures that your food is baked evenly. Say goodbye to unstable temperature.

STEAM-BAKE - LOW, MEDIUM, HIGH HUMIDITY

Able to choose the level of moisture for your food. Retains the moisture of your food during baking.

AUTO HUMIDITY TECHNOLOGY SYSTEM

Intelligently control top and back fan - 1000r/min (top fan) + 1900r/min (back fan) to maintain the most appropriate humidity in the cavity, ensuring the best cooking effect.

AIR-FRYING

OIL-FREE COOKING

Fat removal rate up to 98%. Dual fan high speed rotation with high temperature to remove excessive fat of your food, making your food crispier.

DIAMOND BLUE ENAMEL COATING

Improved resistance to acid and alkaline, oil resistance, durable and easy to clean.

DEHYDRATING

PREVENTS OXIDATION OF FOOD

Dual fan high speed rotation with low temperature to prevent oxidation of food.

sted Inner Layer 304 Stainless Steel

EASY TO CLEAN

- DESCALE
 - Deep cleans the oven's chamber.
- HIGH TEMPERATURE STEAM CLEAN at 100°C for 10 minutes.
- DRY VENTILATION Drying the chamber.
- DEODOR Cavity deodorization.

HUMANIZED DESIGN

- 3 LAYER GLASS WITH LOW-E keep the door surface safe to touch during operation.
- 55 PRESET MENU to cater all your cooking needs.
- 72L CAPACITY Cook food of all shapes and sizes effortlessly.

PROOF FUNCTION & KEEP WARM FUNCTION

Ferments dough with shorter time using 'Proof' function. You can also keep your food warm and defrost using 'Keep Warm' function too.

DEFROST FUNCTION

Rapid thawing of frozen food.

DISHWASHER



ZERO DIRT



HIGH PRESSURE HYDROJET TECHNOLOGY

Hundreds of billions of cavitation bubbles are continuously generated in water, accelerating the speed and momentum of the water flow to remove stubborn stains effectively. Inspired by the cleaning technology of the bottom of a submarine.

Patent No. 202211216010.X & 202010288660.X



BRUSHLESS DIRECT-CURRENT INVERTER (BLDC)

Provide a maximum 40,000 Pa strong water pressure and adjusts according to different wash settings to provide a stable and powerful wash.



ALL-CLEAN INTELLIGENT CLEANING SYSTEM

2 main spray arms + 2 supporting spray arms at the back of the chamber enhance cleaning effect by forming a 4-layer enveloping spray, alongside with 37 larger spray holes for a wider coverage to clean dishes.


ZERO ODOUR



AUTOMATED DRAINAGE SYSTEM

Water drainage is tilted for 15° and automatically closes its valve after washing to prevent backflow of sewage, keeping dishwasher odourless and clean.

Patent No. 202023337590 7

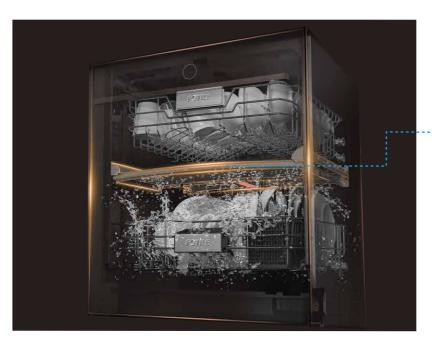



ZERO WORRY

Dual ventilation drying distributes heat evenly and effectively. Eliminates **99.99**% of harmful bacteria under high temperature of **75°C**. Patent No.202121479074.X

ZERO WASTE

SMART SPACE MANAGEMENT SYSTEM

It expands a partition and divide the chamber into upper and lower layer. Saves your water, time and energy consumption.

Patent No. 202010664979.8







STORAGE FUNCTION

Automatic ventilation to store your dishes after cleaning up to 96 hours.

SILENCE+ TECHNOLOGY

Noise level of only 42dB

AUTO MODE

Automatically detect the dirtiness level of your dishes to run the ideal cleaning program.

INNOVATIVE DESIGN

- AUTO-CLEAN PROGRAM Keeping dishwasher cavity clean and odourless.
- 6 CORE + 4 ADDITIONAL PROGRAMS to cater all of your needs.
- ADJUSTABLE HEIGHT
 Adjustable height of 30mm to suit various cabinet height for a worry-free installation.

HUMANIZED DESIGN

- PERFECT FOR FAMILY Fits up to 94 tablewares.
- MEMORY CLEANING
 Panel displays the previous cleaning mode,
 no need to reset everytime.
- EXTERNAL VENTILATION
 Prevent cabinet from getting moldy by releasing hot air externally.

Beyond Clean


Your All-in-One Clean, Dry, Sterilize, Store Solution!



ALL-CLEAN INTELLIGENT CLEANING SYSTEM

High Pressure HydroJet Technology 3.0 + Orbit System Spray Arms

Effectively reaching, and cleansing the most challenging spots within your dishwasher.



TRIO VENTILATION DRYING

Dual hot air + 1 ambient air ventilation drying distributes heat evenly and effectively.

100°C STEAM STERILIZATION

Eliminates 99.9999% of harmful bacteria.



168 HOURS STORAGE

SMART DESIGN

- Knock Twice to Open

Simply give the door two quick knocks, and watch as it glides open effortlessly, granting you easy access to its interior.

 AutoDose+, Automatic Detergent Dispensing System

The liquid and rinse aid dispenser holds sufficient detergent for 15 washes.



- Smart Projection

Display the remaining time of the washing cycle. The projection light will only begin displaying the countdown once the door is securely closed and running.

INNOVATIVE DESIGN



6 CORE + 6 ADDITIONAL PROGRAMS
To cater all your needs.



LOW NOISE LEVEL As low as 40 dB.



AUTO-CLEAN PROGRAM

Keeping dishwasher cavity clean and odourless.

AUTO MODE

Automatically detect the dirtiness level of your dishes to run the ideal cleaning program.

FLEXIBLE RACK ARRANGEMENT

Both upper and lower levels of dish racks offer dedicated spaces, accommodating larger items while providing designated areas for small utensils and specialized sections for irregular items like knives and spatulas.



FOTILE 3-IN-1 THE World's 1ST 3-In-1 Sink Dishwasher SINK DISHWASHER

HIGH PRESSURE HYDROJET TECHNOLOGY

Hundreds of billions of cavitation bubbles are continuously generated in water, accelerating the speed and momentum of the water flow to remove stubborn stains effectively. Inspired by the cleaning technology of the bottom of a submarine.

Patent No. 202211216010.X & 202010288660.X

BLDC BRUSHLESS DIRECT-CURRENT **INVERTER**

Provide a maximum 40,000 Pa strong water pressure and adjusts according to different wash settings to provide a stable and powerful wash.

ALL-CLEAN INTELLIGENT CLEANING SYSTEM

360° CLEANING WITH NO BLIND SPOTS

FOTILE's sink dishwasher rotary spray is designed create a strong waterfall-like blanket of water for a more thorough cleaning. Eliminates **99.99%** of harmful bacteria under high temperature of **75°C**.

AUTOMATED DRAINAGE SYSTEM

Water drainage is tilted for 15° and automatically closes its valve after washing to prevent backflow of sewage, keeping dishwasher odourless and clean. Patent No. 202023337590.7





TRIPLE CONVECTION DRYING

Utilizes unique "PTC hot air + residual heat + ventilation" triple drying technology. After the washing cycle is complete, the door automatically opens, allowing hot air to blow in and accelerate drying. Internal moisture is naturally expelled, preventing it from being trapped inside

STORAGE FUNCTION

Automatic ventilation to store your dishes after cleaning up to 96 hours.

PURIFIER FOR FRUITS & VEGETABLE

Remove all the harmful pesticides residues using HydroJet technology.

HUMANIZED DESIGN

IEXTRA LARGE SINK SIZE

The sink's dimensions are 455mm (w) \times 405mm (d) \times 211mm (h) providing plenty of room for your large pots and pans.

| PERFECT FOR FAMILY

Fits up to 55 tablewares.

SAVES SPACE

Works as a sink, fruit and vegetable purifier and dishwasher, 3-in-1 appliances, saves your kitchen space.

NO MORE BENDING **DOWN**

No more bending down to load dishes, the Sink Dishwasher is perfect for pregnant women and the elderly

THE GRAND KITCHEN

Imagine a kitchen not only defined by sophisticated style and luxurious finishes, but equipped to deliver the cooking solution that caters to every Malaysian kitchen's need.

MICROWAVE OVEN HW25800P-C2T



PACKAGES

RANGE HOOD JQG9055-i



- · BLDC Inverter Motor · Smart Sync
- · Smart SMOTION Detection · Black Tempered Glass Surface
- · Auto turbo system
- Unique magnet grease filter Screen lock Delay off function
 Unrestrained airflow 2000m³/h
- · IEC airflow 1420m³/h
- · Air pressure 1050Pa
- · Noise level ≤55dB
- · Oil Filtration Rate: 95% · Odor Reduction Rate: 98.8%

INDUCTION HOB EIG76203

DISHWASHER

BD2BV01



- Made-in-Germany SCHOTT CERAN® glass surface
- . 4x magnetic protection . 8 safety features
- . Dual-core CPU
- Removable magnetic knob
 - · Boost & Keep Warm function . 1-9 power levels
- · Timer: 1-99min · Heating load (kW): Total 3.4kW / L:3.00 R:3.00
- · To be connected directly to a min. 16A
- circuit breaker

OVEN KSG7003AT

OVEN

KSG7003AT



- Multi-function oven with 11 functions
- 5 level shelf positions with stainless steel holder Removeable triple glazed door with double Low E-glass
- Hot air filter and 5 Japanese heating tubes Damping hinge for soft closing
 Child lock function and timer
- Illuminated 'O' touch screen
- . To be connected directly to a min.15A circuit breaker Power: 3.2kW . Capacity 70L

STEAM OVEN SCD42-C2T



Dual-effect steam technology, fast heating

RM5,800

- Illuminated 'O' touch screen Anti-condensation technology
- Dynamic steam balance system 1.4 litre water tank
- 8 preset programs Continuous steam for 120mins
- Power: 2.2kW Capacity 42L

MICROWAVE OVEN HW25800P-C2T



- Independent ventilation system Illuminated 'O' touch screen
- Microwave and grill heating Child lock function
- 8 express cooking menu
- Input power: Microwave 1.25kW / Grill 0.75kW Output power : 0.8kW
- Capacity 25L

DISHWASHER BD2BV01



High Pressure HydroJet Technology - 40,000Pa


Smart Space Management System


Automated Drainage System Automatic ventilation, keeps storage clean for 96 hours

Auto clean program Fits 47-94 pieces of tablewares

. 6 core + 4 additional programs Household water pressure: 0.14MPa - 1MPa Dual ventilation drying . Fan dry: up to 45mins Dishwasher capacity 136L



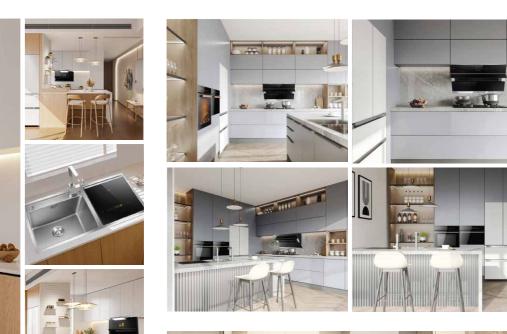

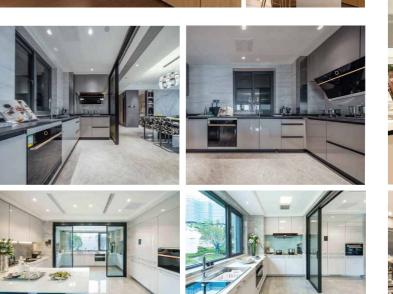









RANGE HOOD AMG9068



- · BLDC Inverter Motor
- · Smart SMOTION Detection
- Smart sync
- · Smart air diverter
- Rear motor extraction · Screen lock · Auto turbo system · Delay off function · Unrestrained airflow 2800m³/h
- · IEC airflow 1600m³/h
- · Air pressure 1480Pa · Noise level ≤46dB
- · Oil Filtration Rate: 92.9% · Odor Reduction Rate: 98%

GAS HOB GEG88201



- . 88cm with 2-burner gas hob
- . Patented Jet collisioon Techonology
- . Smart sync with range hood
- . Smart timer up to 180-min . 7+n adjustable frame levels
- . Heating load (kW) L: 5.35 R: 5.35
- . ≥ 60% heating efficiency
- . Fast ignition, low battery reminder . Safety ignition pin
- . Cast iron grate with tempered glass
- . Flexi cut-out size
- . Removable washing up
- - - - . 1200ml water tank, continues
 - working up to 120 mins . Superheated Steam up to 120°C

COMBI OVEN HZK72-H1



- . Steam, Bake, Air Fry and Dehydrate
- . 3 layer glass door with Low-E Steam-bake smart combo
- . 17 cooking modes . 55 preset programs

Fermentation, keep warm, defrost



- . Microwave and grill heating
- . Touch control . Child lock function
- . Child lock function
 . Wide LED screen display
 . 8 express cooking menu
 . Input power: Microwave 1.35kW / Grill 0.85kW . Output power: 0.8kW
- . Capacity 25L

SINK DISHWASHER **SD2F-P6**




- . High Pressure HydroJet Technology 40,000Pa
- . Automated Drainage System







- . Automated Drainage System
 . Storage up to 96 hours
 . Fits 55 pieces of tablewares
 . Food grade 304 stainless steel sink material
 . Waterproofing capacitive touch screen
 . Household water pressure: 0.14MPa 1MPa
 . Triple drying technology. Fan dry: 30 mins
 . Large sink size: 455mm (I) x 405mm (w) x 211mm (d)







ONE OVEN PLUS One Oven To Cook It All

STEAM

4 STEAMING FUNCTIONS - LOW, NORMAL, HIGH, QUICK STEAM

Low steam of temperature as low as 30 °C to high steam with temperature up to 120 °C. Powerful steam generated in just 30s. Quick steam assist in steaming frozen food without defrosting them. Preserves the taste and texture of your food.

DYNAMIC STEAM BALANCED TECHNOLOGY

Ensure fresh steam supply and preserves the taste of your food.

BAKING

5 BAKING MODES

Full	Convect	Top	Broil	Steam
Convection	Bake	Bottom		Bake
Top + Bottom	Rear +	Top +	Тор	Top + Rear +
Rear + Fan	Fan	Bottom		Fan + Steam


DUAL TEMPERATURE CONTROL

Separately control top and bottom heating element. Temperature difference up to **30°C.** eg. Top 180°C, Bottom 150°C.

UNIFORM TEMPERATURE

Ensures that your food is baked evenly. Say goodbye to unstable temperature.

3 Levels of Humidity to choose. Retains the moisture of your food during baking.

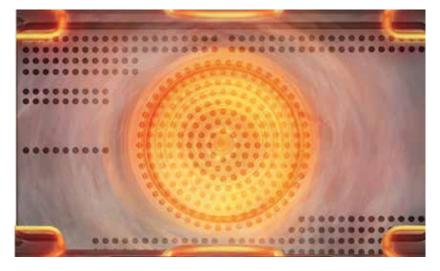



AIR-FRYING

OIL-FREE COOKING

High speed hot air rotation - 2000r/min with 98.6% Fat Removal Rate to remove excessive fat of your food, making your food crispier.

DEHYDRATING

PREVENTS OXIDATION OF FOOD

High Speed Rotation - 2000r/min to prevents oxidation of food.

EASY TO CLEAN

Descale notification will be displayed when the oven has operated up to 50 hours of steaming, to notify users to deep cleans the oven.

- HIGH TEMPERATURE STEAM CLEAN at 100°C for 10 minutes.
- DRY VENTILATION Drying the chamber.
- DEODOR

Minimize / remove the odor.

- STERILIZATION Eliminates harmful bacteria up to 99.99%.

FUNCTIONS

- JERKY FUNCTION

Drying meat with temperature ranges from 50 - 230°C

- STEW FUNCTION

Stew soup or dessert up to 4 hours.

- PROOF FUNCTION

Ferments dough with shorter time.

- KEEP WARM FUNCTION Keep your food warm.
- DEFROST FUNCTION Thaw frozen food before cooking.

HUMANIZED DESIGN

- 3 LAYER GLASS WITH LOW-E Keep the door surface safe to touch during operation.
- 50+6 PRESET MENU To cater all your cooking needs.
- 32L CAPACITY Cook food of all shapes and sizes effortlessly.

FOTILE X

RCP RM6,400 RM6,500

RANGE HOOD AMG9068

- · BLDC Inverter Motor
- · Smart SMOTION Detection
- · Smart sync
- Smart air diverter
- Rear motor extraction
- Auto turbo system
- Unrestrained airflow 2800m³/h
- IEC airflow 1600m³/h
- Air pressure 1480Pa
- Noise level ≤46dB
- Screen lock
- Delay off function
- Oil Filtration Rate: 92.9%
- Odor Reduction Rate: 98%

RANGE HOOD AMG9007-i



- · BLDC Inverter Motor
- · Smart SMOTION Detection
- · Smart sync
- Smart air diverter
- Rear motor extraction
- Auto turbo system
- Screen lock
- Delay off function
- Unrestrained airflow 1930m³/h
- IEC airflow 1390m³/h
- Air pressure 990Pa
- Noise level ≤46dB
- Oil Filtration Rate: 92%
- Odor Reduction Rate: 97%

FOTILE Z SERIES

RANGE HOOD ZMG9057



- BLDC Inverter Motor Smart Sync
- · Smart SMOTION Detection
- · Intelligent air management
- Dual removeable grill filter
- Auto turbo system
- Delay off function
- Unrestrained airflow 2450m³/h
- · IEC airflow 1580m³/h
- Air pressure 1140Pa
- Noise level ≤48dB Oil Filtration Rate: 92%
- Odor Reduction Rate: 97%

RANGE HOOD ZMG9056



- · BLDC Inverter Motor · Smart Sync
- · Smart SMOTION Detection
- Intelligent air management
- Dual removeable grill filter
- Auto turbo system
- Delay off function
- Unrestrained airflow 2450m³/h
- IEC airflow 1510m³/h Air pressure 1170Pa
- Noise level ≤49dB
- Oil Filtration Rate: 92%
- Odor Reduction Rate: 97%

FOTILE V SERIES

FOTILE W SERIES

RANGE HOOD JQG9009X



- · BLDC Inverter Motor
- · Smart SMOTION Detection
- Smart sync
- 3-layer centrifugal filter + oil free technology · Noise level ≤52dB
- Dual removeable grill filter · Screen lock Auto turbo system · Air pressure 1290Pa
- Delay off function · Memory function
- Unrestrained airflow 2100m³/h
- IEC airflow 1440m³/h
- Oil Filtration Rate: 95% Odor Reduction Rate: 98%

RANGE HOOD JQG9055-i



- · BLDC Inverter Motor
- · Smart SMOTION Detection
- · Smart Sync
- Auto turbo system
- Unique magnet grease filter Screen lock · Delay off function
- Unrestrained airflow 2000m3/h
- IEC airflow 1420m3/h
- Air pressure 1050Pa
- Noise level ≤55dB
- Oil Filtration Rate: 95% Odor Reduction Rate: 98.8%

RANGE HOOD JQG9031



- · Smart SMOTION Detection
- · 180-sec turbo system
- Unique magnet grease filter
- Screen lock
- Delay off function Unrestrained airflow 1750m³/h
- · IEC airflow 1340m³/h
- Air pressure 460Pa
- Noise level ≤55dB
- Oil Filtration Rate: 95% Odor Reduction Rate: 98%

RANGE HOOD EMG9030



- . BLDC inverter motor
- . Smart Lifting System
- Intelligent air management
- Auto turbo system Delay off function
- Unrestrained airflow 1700m3/h
- IEC airflow 1200m³/h Air pressure 720Pa
- Noise level ≤48dB
- Oil Filtration Rate: 92%
- Odor Reduction Rate: 98%

FOTILE W SERIES

RANGE HOOD EMG9035



- · BLDC Inverter Motor
- Smart SMOTION Detection Patented Wing-like Surround
- Suction Plate Auto turbo system Screen lock · Delay off function
- Unrestrained airflow 1950m³/h IEC airflow 1420m³/h
- Air pressure 880Pa
- Noise level ≤48dB
- Oil Filtration Rate: 92%
- Odor Reduction Rate: 97%

RANGE HOOD EMG9037



- Smart SMOTION Detection
- 180-sec turbo system
- Patented Wing-like Surround
- Rounded edge Delay off function
- Unrestrained airflow 1600m³/h IEC airflow 1240m³/h
- Air pressure 420Pa
- Noise level ≤54dB
- Oil Filtration Rate: 92% Odor Reduction Rate: 97%



- · Smart SMOTION Detection
- 180-sec turbo system Patented Wing-like Surround Suction Plate
- Delay off function Unrestrained airflow 1600m³/h
- IEC airflow 1210m³/h Air pressure 430Pa

Rounded edge

- Noise level ≤55dB
- Oil Filtration Rate: 92% Odor Reduction Rate: 97%

RCP RM3,800

- · Recirculation hood
- · BLDC Inverter Motor
- Smart SMOTION Detection
- 100-sec turbo system
- Oil filtration rate 96% Patented Wing-like Surround Suction Plate
- Carbon filter with 10.5mm buffer space with outer aluminium filter
- Filter replacement notification after 150-450 hours · Delay off function
- Unrestrained airflow 1400m³/h IEC airflow 920m3/h
- Air pressure 850Pa
- Noise level ≤53dB
- Oil Filtration Rate: 96%
- Odor Reduction Rate: 98%



WHAT IS IEC?

It is an international standard and conformity assessment body for all fields of electronology standard, cooker hood airflow should have this standard number (IEC 61591)



EPS-i SERIES

GAS HOB GEG88201





- · 88cm with 2-burner gas hob
- Patented Jet Collision Technology
- Smart sync with range hood
- Smart timer up to 180-min
- 7+n adjustable flame levels
- · Heating load (kW): L:5.35 R:5.35
- ≥60% heating efficiency
- Flexi cut-out size
- Safety ignition pin
- · Flame Failure Device (FFD)
- Cast iron grate with tempered glass
- Fast ignition
- Low battery indicator
- Removable washing cup

GAS HOB GEG88306



- RM2,890 RM2.970
- · 88cm with 3-burner gas hob
- Patented Jet Collision Technology
- 7+n adjustable flame levels
- · Heating load (kW): L:5.35 M: 1.70 R:5.35
- ≥60% heating efficiency
- Flexi cut-out size
- Safety ignition pin
- Flame Failure Device (FFD)
- Cast iron grate with tempered glass
- Fast ignition
- Low battery reminder
- Removable washing cup

TRI-RINGS SERIES

GAS HOB GLS36503





- 91cm with 5-burner gas hob
- · Tri-rings Flame
- Top air intake
- · Heating load (kW):
- LR:1.6 LF:3.4 C:5 RR:0.7 RF:3.4
- Brass material burner
- Safety ignition pin
- Flame Failure Device (FFD)
- 304 Stainless steel surface
- Fast ignition . 13amp power socket

GAS HOB GHG78221-i

SUPER FLAME SERIES





- · 78cm with 2-burner gas hob
- Smart sync with range hood
- Heating load (kW): L:5.0 R:5.0
- ≥60% heating efficiency
- Flexi cut-out size
- Safety ignition pin
- Flame Failure Device (FFD)
- Cast iron grate with tempered glass
- Instant ignition
- Stable Pan Support

SUPER FLAME SERIES

GAS HOB GHG73201



- 73cm with 2-burner gas hob · Heating load (kW): L:5.0 R:5.0 · ≥60% heating efficiency

- Safety ignition pin
 Flame Failure Device (FFD)
- Cast iron grate with tempered glass
- Fast ignition
- . Low battery reminder . Heat shield pan support

GAS HOB GHG78215





· 78cm with 2-burner gas hob

- · Heating load (kW): L:5.0 R:5.0 · ≥60% heating efficiency
- Flexi cut-out size
- Safety ignition pin
- Flame Failure Device (FFD)
- Cast iron grate with tempered glass
- Fast ignition
- Low battery reminder
- Removable washing cup

GAS HOB GHG78312





- **78cm with 3-burner gas hob** Heating load (kW): L: 5.0 M: 1.7 R: 5.0
- ≥60% heating efficiency
- Safety ignition pin
- Flame Failure Device (FFD)
- Cast iron grate with tempered glass
- Fast ignition
- Low battery reminder
- Removable washing cup

GAS HOB GHG88215





· 88cm with 2-burner gas hob

- Heating load (kW): L: 5.0 R: 5.0 ≥60% heating efficiency
- Flexi cut-out size
- Safety ignition pin
- Flame Failure Device (FFD)
- Cast iron grate with tempered glass
- Fast ignition
- Low battery reminder
- Removable washing cup

ELECTRIC HOB

CERAMIC HOB EEG75201





- Made-in-Germany SCHOTT CERAN® ceramic glass surface
- Made-in-Germany E.G.O electric radiation technology
- 3 heat radiation zones, 1-5 power level Timer: 1-599min
- · Heating load (kW): Total 4.5kW L: 0.2 1 (inner ring only), 0.44 · 2.2 (inner + outer rings)
- R: 0.46 2.3 (inner + outer rings) To be connected directly to a min.

20A circuit breaker

CERAMIC HOB EEG60301





- ceramic glass surface
- Made-in Germany E.G.O electric radiation technology
- power levels
- Touch control
- Easy to clean
- Heating load (kW): Total: 5.2kW
- L-Upper: 1.8 L-Bottom: 1.2 R: 2.2
- Made-in Germany SCHOTT CERAN®
- 4 heat radiation heating zones, 1-9
- Timer: 1-99min
- To be connected directly to a min. 25A circuit breaker

INDUCTION HOB EIG76203



- Made-in-Germany SCHOTT CERAN® ceramic glass surface
- 4x magnetic protection
- 8 safety features
- Dual-core CPU
- Boost & Keep Warm function
- Removable magnetic knob
- 1-9 power levels Timer: 1-99min
- Heating load (kW): Total 3.4kW L: 3.0 R: 3.0
- To be connected directly to a min. 16A circuit breaker

HYBRID HOB MEG70201





- Made-in-Germany SCHOTT CERAN®
- 6 safety features
- Touch control
- Timer: 10 Hours
- Pause & Keep Warm function Suitable for different types of cookware
- ≥86% heating efficiency Heating load (kW): Total 3.6kW
- L: 2.2 R: 2.2 To be connected directly to a min. 16A circuit breaker





OVEN

DOMINO HOB

GAS HOB GEG30103



- . 1-burner domino gas hob . Heating load (kW): 5.35 . ≥60% heating efficiency . Patented Jet Collision Technology
- Safety ignition pin Flame Failure Device (FFD) Fast Ignition
- Cast iron grate with tempered glass Removable washing cup

CERAMIC HOB D7RW



- Made-in Germany SCHOTT CERAN®
- ceramic glass surface Made-in Germany E.G.O electric radiation technology
- 2 heat radiation heating zones, 1-9 power levels
- Touch control . Easy to clean
- Timer: 1-99min Heating load (kW): 2.4kW
- To be connected directly to a min. 13A circuit breaker

CERAMIC HOB EEG30202



- Made-in Germany SCHOTT CERAN® ceramic glass surface
- Made-in Germany E.G.O electric radiation technology
- 3 heat radiation heating zones, 1-9 power levels
- Touch control . Easy to clean
- Timer: 1-99min
- Timer: 1-99min
 Heating load (kW): Total: 2.9kW
 Upper: 1.7; Bottom: 1.2
 To be connected directly to a min.
- 15A circuit breaker

INDUCTION HOB EIG30102



- Made-in-Germany SCHOTT CERAN® glass surface
- 4x magnetic protection
- 7 safety features . Dual-core CPU Boost & Keep Warm function
- 1-9 power levels
- Timer: 1-99min
- Heating load (kW): 3.0kW
- To be connected directly to a min. 15A circuit breaker

MORE VARIETY ON YOUR DAILY COOKING

OVEN

OVEN KSG7007A

RCP RM3,780 RM3,880

- Multi-function oven with 8 functions
- Removeable triple glazed door with Low E-glass
- Easy operation with mechanical control
- 5 level shelf positions with stainless steel holder
- Beginner friendly cooking tips
- 3 Japanese heating tubes
- Anti-spill grill for increased safety
- Front ventilation system
- Fermentation
- Power: 2.8kW . Capacity 70L
- To be connected directly to a min. 15A circuit breaker

ONE OVEN

ONE OVEN HYZK26-E1



- Steam, Bake, Air Fry and Dehydrate
- 3 layer glass door with Low-E
- Freestanding oven
- 10 cooking modes
- 3 cleaning modes
- 40 preset cooking programs
- 900ml water tank, continues working up to 96 mins
- Superheated Steam up to 110°C
- Fermentation, keep warm
- Dimension W x D x H (mm): 451 x 478 x 355
- Power: 2.1kW
- . Capacity 26L

ONE OVEN PLUS HYZK32-E3



- Steam, Bake, Air Fry and Dehydrate
- 3 layer glass door with Low-E
- Freestanding oven
- Dual temperature control
- 15 cooking modes . 5 cleaning modes
- 50+6 preset cooking programs
- 900ml water tank, continues working up to 90 mins
- Superheated Steam up to 120°C
- Stew, fermentation, keep warm, defrost, sterilization, deodor
- Dimension $W \times D \times H$ (mm):
- 474 x 512 x 375
- . Power: 2.15kW
- . Capacity 32L

MICROWAVE OVEN

MICROWAVE OVEN HW25800K-03G



- Independent ventilation system
- Microwave and grill heating
- Touch control
- Child lock function
- Wide LED screen display
- 8 express cooking menu
- Input power: Microwave: 1.35kW Grill : 0.85kW
- Output power: 0.8kW
- Capacity 25L

COMBIOVEN HZK-TS1.A



- Steam, Bake, Air Fry and Dehydrate
- 3 layer glass door with Low-E
- Auto humidity technology system 10 cooking modes . 3 cleaning modes
- 52+3 preset programs
- 1300ml water tank, continues working up to 90 mins
- Superheated Steam up to 120°C
- Fermentation, keep warm, defrost Power: 3.4kW . Capacity 42L
- To be connected directly to a min. 15A circuit breaker

COMBI OVEN

COMBI OVEN HZK72-H1



- Steam, Bake, Air Fry and Dehydrate
- 3 layer glass door with Low-E
- Auto humidity technology system
- Steam-bake smart combo . Multilayer cooking
- 17 cooking modes . 6 support modes
- 55 preset programs . 1200ml water tank, continues working up to 120 mins
- Superheated Steam up to 120°C
- Fermentation, keep warm, defrost Power: 3.4kW . Capacity 72L
- To be connected directly to a min.
- 15A circuit breaker

OVEN KSG7003AT



OVEN

RCP RM5,200 RM5,300

- Multi-function oven with 11 functions
- Illuminated 'O' touch screen
- Removeable triple glazed door with double Low E-glass
- LED digital display with touch control
- 5 level shelf positions with stainless steel holder
 Beginner friendly cooking tips
 Child lock function and timer
 Damping hinge for soft closing
 Hot air filter and 5 Japanese heating tubes

- Front ventilation system
- Fermentation
- Power: 3.2kW
- Capacity 70L
- To be connected directly to a min.
- 15A circuit breaker

STEAM OVEN

STEAM OVEN SCD42-C2T



- Dual-effect steam technology, fast heating
- Illuminated 'O' touch screen
- Anti-condensation technology
- Dynamic steam balance system
- 1.4 litre water tank
- 8 preset programs
- Continuous steam for 120mins Power: 2.2kW
- Capacity 42L

MICROWAVE OVEN

MICROWAVE OVEN HW25800P-C2T





- Independent ventilation system
- Illuminated 'O' touch screen
- Microwave and grill heating
- Child lock function
- 8 express cooking menu
- Input power: Microwave 1.25kW Grill 0.75kW
- Output power: 0.5kW
- Capacity 25L

HERO

DISHWASHER



DISHWASHER BD3BG6



- High Pressure HydroJet Technology 3.0 50,000Pa
- Trio Ventilation Drying. Fan Dry: 20mins
- 100°C Steam Sterilization
- 168 Hours Storage System Automated Drainage System
- Knock twice to open
- Smart projection Fits 47-112 pieces of tablewares
- 6 core + 6 additional programs Household water pressure: 0.14MPa 1MPa
- Dishwasher Capacity 160L

DISHWASHER BD2BG5



- High Pressure HydroJet Technology 34,000Pa Dual Ventilation Drying. Fan Dry: up to 45mins 75°C High-temperature Sterilization
- 96 Hours Storage System
- Automated Drainage System
- Fits 47-88 pieces of tablewares
- 6 core + 3 additional programs
- Household water pressure: 0.14MPa 1MPa Dishwasher Capacity 101L

DISHWASHER BD2BV01



- High Pressure HydroJet Technology 40,000Pa
- Dual ventilation drying . Fan dry: 45mins 75°C High Temperature Sterilization

- 96 Hours Storage System Smart Space Management System Automated Drainage System
- Auto clean program
- Fits 47-94 pieces of tablewares
- 6 core + 4 additional programs
- Household water pressure: 0.14MPa 1MPa
- Dishwasher capacity 136L

SINK DISHWASHER SD2F-P6



Faucet is not included

- 3-in-1 sink dishwasher Sink, Dishwasher, Fruits
- & Vegetable Purifier
 High Pressure HydroJet Technology 40,000Pa
 Triple drying technology . Fan dry: 30 mins
 96 Hours Storage System

- Automated Drainage System Fits 55 pieces of tablewares
- Food grade 304 stainless steel sink material
- Waterproofing capacitive touch screen
 Household water pressure: 0.14MPa 1MPa
- Large sink size: 455mm (l) x 405mm (w) x 211mm (d)

INSTALLATION GUIDE

SINK-DISHWASHER SD2F-P6 INSTALLATION GUIDE


BEFORE INSTALLATION REQUIREMENT:

- 1. The outlet (drainage) pipe must be ≤350mm from the ground, pipe diameter ≥50mm

 2. Table top cut-out size must be ready before installation

 3. Prepare a 13amp power point inside the cabinet

 ★ 4. Installation type: Top mount only

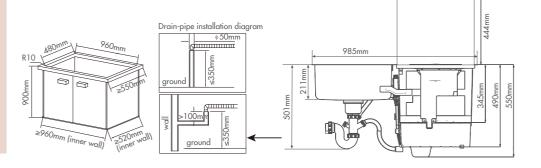

BUILT-IN DISHWASHER INSTALLATION GUIDE

BEFORE INSTALLATION REQUIREMENT:

- 1. The outlet (drainage) pipe & water inlet must be near to dishwasher.
 2. The drain hose hook from the ground must be at least 300 mm ~ 500 mm.
 3. Cabinet cut-out size must be ready before installation
 4. Prepare a 13amp power point inside the cabinet.
 5. Do not place any objects to block the ventilation outlet at bottom front of dishwasher. of dishwasher.
- 6. If there is a base of cabinet, it must be strong enough to withstand more than 60Kg.
- 7. Recommended to prepare skirting board.
 8. For BD3B-G6 Dishwasher, it must be installed according to the Figure 1.1





Figure 1.1


Dishwaster

BD2BV01 & BD3BG6

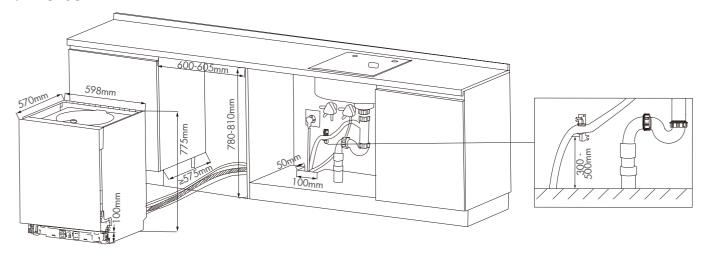

Dishwaster



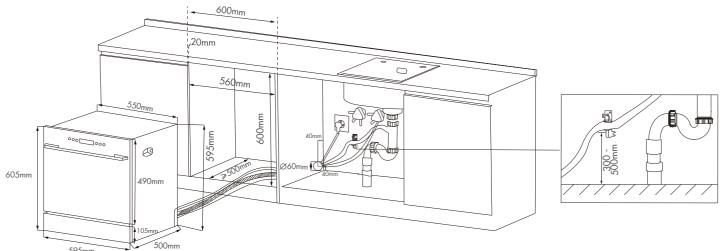


INSTALLATION DIAGRAM


HOOD JQG9031

★ Distance is calculated from the pan support of hob

HOOD **EMG9037**




АМ*G***9007-***i*




★ Distance is calculated from the pan support of hob

HOOD ZMG9056 ZMG9057




➤ Distance is calculated from the pan support of hob

HOOD




HOOD JQG9009X



★ The distance of 750mm - 800mm is calculated from pan support of hob to the hood's screw hooks.


HOOD EMG9030




★ Distance is calculated from the pan support of hob


HOOD

EMG9008-CR



НООВ **JQG9055-і**







★ Distance is calculated from the pan support of hob

HOOD

EMG9035






★ Distance is calculated from the pan support of hob


нов

GEG88201 GEG88306 GHG88215





нов GHG73201




INSTALLATION DIAGRAM

нов GHG78215 GHG78221-i




нов GHG78312



НОВ


GLS36503

нов EIG76203




TO BE CONNECTED DIRECTLY TO A MIN. 16AMP CIRCUIT BREAKER

нов EEG75201




TO BE CONNECTED DIRECTLY TO A MIN. 20AMP CIRCUIT BREAKER

НОВ GEG30103



HOB D7RW EIG30102



D7RW: TO BE CONNECTED DIRECTLY TO A MIN.
13AMP CIRCUIT BREAKER
EIG30102: TO BE CONNECTED DIRECTLY TO A MIN

HOB EEG30202



TO BE CONNECTED DIRECTLY TO A MIN. 15AMP

нов EEG60301




TO BE CONNECTED DIRECTLY TO A MIN. 25AMP


НОВ MEG70201




STEAM OVEN



MICROWAVE OVEN




OVEN



TO BE CONNECTED DIRECTLY TO A MIN. 15AMP

COMBI OVEN HZK-TS1.A




CIRCUIT BREAKER

HOOD ACCESSORY

HONEYCOMB RECIRCULATION KIT


Available for all models except for EMG9008-CR



RCP RM **198**

- · Oil filtration rate 96.9%
- High density activated carbon content
 2.4x carbon mesh density with 20mm thickness
- Non-stick coating for hassle-free cleaning Filter replacement after 180 hours of usage
- ★ Recommended only for users that cannot do ducting in their kitchen

COMBI OVEN



TO BE CONNECTED DIRECTLY TO A MIN. 15AMP CIRCUIT BREAKER

VENT COVER IS NOT INCLUDED IN THE HONEYCOMB RECIRCULATION KIT

- 2. RECOMMENDED ONLY FOR USERS THAT CANNOT DO DUCTING IN THEIR KITCH
- HONEYCOMB RECIRCULATION KIT NEED TO BE CHANGE EVERY 180 HOURS.

 RECOMMENDED TO KEEP LIPPER CARINET DOOR OPEN OR ENSURE ENOUGH VENTIL.
- 4. RECOMMENDED TO KEEP UPPER CABINET DOOR OPEN OR ENSURE ENOUGH VENTILATION INSIDE

HAPPINESS STARTS IN YOUR KITCHEN

Since its inception in 1996, FOTILE has carved a niched in the industry of being the No 1 high-end kitchen appliances brand in China, specializes in developing built-in kitchen appliances like hoods, hobs, ovens, combi ovens, microwave ovens, steam ovens, dishwashers & water purifier.

We have the largest R&D center in the world covering an area of 8000sqm. With technology, innovation design and performance as the key factors in Fotile manufacturing, we have achieved 13,000+ patents in product and 3300+ in invention, bringing innovative and good quality product to over 17 millions of families around the world. FOTILE commitments to excellence not only bringing satisfaction to our customers, we have win a numerous international accolades namely RedDots design awards, IF Product Design Award that uplifting the industry standard of designs and product innovations.

At FOTILE, our business is built on the foundation of product innovation and creating kitchen appliances that are functional, stylish and family oriented. That is why FOTILE is constantly inventing, designing and creating extraordinary products while maintaining its reputation as a leading kitchen expert that puts families at the first place.

Marking a remarkable milestone, FOTILE has launched its first largest kitchen appliances gallery named the "Fotile Style", located at TaoJiang road, Shanghai, in year 2012. This gallery showcasing the brand's most prestigious kitchen appliances. A 'futuristic corner' is introduced in this gallery, allows visitors to take a glimpse into some of FOTILE'S most innovative technology.

With over 20 years of experience in servicing Malaysian customers, FOTILE Marketing Sdn. Bhd as the sole distributor of FOTILE kitchen appliances in Malaysia, has the expertise to offer functional and stylish kitchen appliances that suited to Asian cooking.

Today, FOTILE Malaysia enjoys its position as a reputable premium kitchenware brand in Malaysia with a strong following of happy and satisfied customers. We strive to innovate our product and service, providing a full spectrum of cooking solutions that caters to every Malaysian kitchen need.

Available in more than 30 countries around the world. 10, 000+ families choose FOTILE every day.

5000+ patents for kitchen appliances*, 900+ patents for invention*, leading technological innovation in the kitchen industry

Dusseldorf, Germany; Osaka, Japan; Ningbo, China; three global centers

Revise international standards* for extractor hoods

- * The patents are mainly in China.
- * IEC 60335-2-31: Household and Similar Electrical Appliances-Safety-Part
- 2-31: Particular Requirements for Range Hoods and Other Cooking Fume Extractors.

Authorized Dealer

WARRANTY:

Range Hood - 3-year warranty for general parts, 10-year warranty for motor*

Gas Hob - 2-year warranty for general parts, 10-year warranty for tempered glass*

Electric Hob, Oven, Microwave Oven, Steam Oven, Combi Oven, Dishwasher

- 2-year warranty for general parts*

One Oven Series - 1-year warranty for general parts*

Water Purifier - 2-year warranty for general parts*

*Terms & Conditions apply. Price of hood is inclusive of 1 standard 7" ducting, 1 end cap and 1 flue extension with

U-bracket. All prices, pictures, colours, models, diagrams & specifications are for reference purposes only and are

251101

FOTILE Marketing Sdn Bhd





