
WWW.FOTILEGLOBAL.COM

FOTILE always believes that, only by persistently focusing on kitchen industry, can we create advanced kitchen technology and provide professional kitchen problem solutions. Now, FOTILE kitchen appliance takes the lead in applying humanized, original functions and technologies. Moreover, FOTILE takes the key words of "built-in", "comprehensive set", to design a new life style:fashionable, healthy, convenient and delight. FOTILE ceaselessly drive the kitchen technology, drive your high quality life by her specialty.

Any needs, please contact FOTILE service center. Some pictures in this manual are sketch map, only for reference. If there are some discrepancies, please subject to real object.

FOTILE



GAS STOVE

User Manual

GHG88215 GHG78215 GEG30103 GEG88306 GEG88201 GHG86328 GEG88201-Y GEG88306-Y GHG78221-i

Please read carefully about the user manual before using the product.

And keep it well after reading, for future reference.

Honorable guest, thank you for your choice of FOTILE products. Please read through the manual to be familiar with the correct operation norms and enjoy cooking.

FOTILE'S mission is to make our home better. It is our duty to let you satisfy with FOTILE products. Please read the user manual carefully before using it, and operate it complying with the manual requests. The manual description is important to keep the product a good working condition. And you will lose the free warranty right if the product is failed to use due to your improper operation, thus any direct or indirect free warranty certificate will be rejected by FOTILE authorized service center. Meanwhile, we suggest you contact FOTILE service center when the product need to be repaired no matter within or exceed the warranty period. FOTILE star-level service goal is to make customers fully satisfied by our tireless efforts.

CONTENTS

Warning and Safety Instructions			
Usage	Specification and Structure	3	
	Operation Instruction	5	
	Fire Adjustment	6	
	Using the hood linkage-function	7	
Note on timed operation			
Cleaning and Maintenance			
Normal Malfunction and Trouble Shooting			
Installation Packing List			
Installation Methods			




Warning and Safety Instructions

Special version:

Please properly use the appliance, strictly complying with the user manual. FOTILE company will not bear responsibility for property loss and personal injury due to improper use.

⚠Strictly Execute


	The gas stove can be used only in family kitchen. Please do not install it in the bath room, bed room, basement or places that are flammable, explosive and corrosive.
	Such works as gas stove installation, refitting, removal, dismantle, repair should be done by certificated companies and operated by professional people.
Gas Usage Safty manual	You must ask gas operating agency for "Gas Usage Safety Manual", and comply with it. Please check whether the seal ring is airtight when fixing the pressure-reducing valve every time, otherwise, the gas stove will go wrong due to gas pressure abnormity.
suds	To prevent carbon monoxide poisoning, after installation and before usage, please make a leakage test. Keep the room ventilated when daily use.
	If there is gas leak, please turn off the switch knob and general gas valve soon, open the window, contact FOTILE service center to repair it. At this time, don't touch the power switch or ignite, and don't use mobile phone, fixed-line telephone, etc, to prevent explosion.
	Please don't let the gas stove work at strong wind disturb environment, because it will influence the normal burning, even failed to work.
	If there happens burning due to over high oil temperature, please cover the source of fire with large size metal items, like irony pot cover(please don't use water), and close the general gas valve.

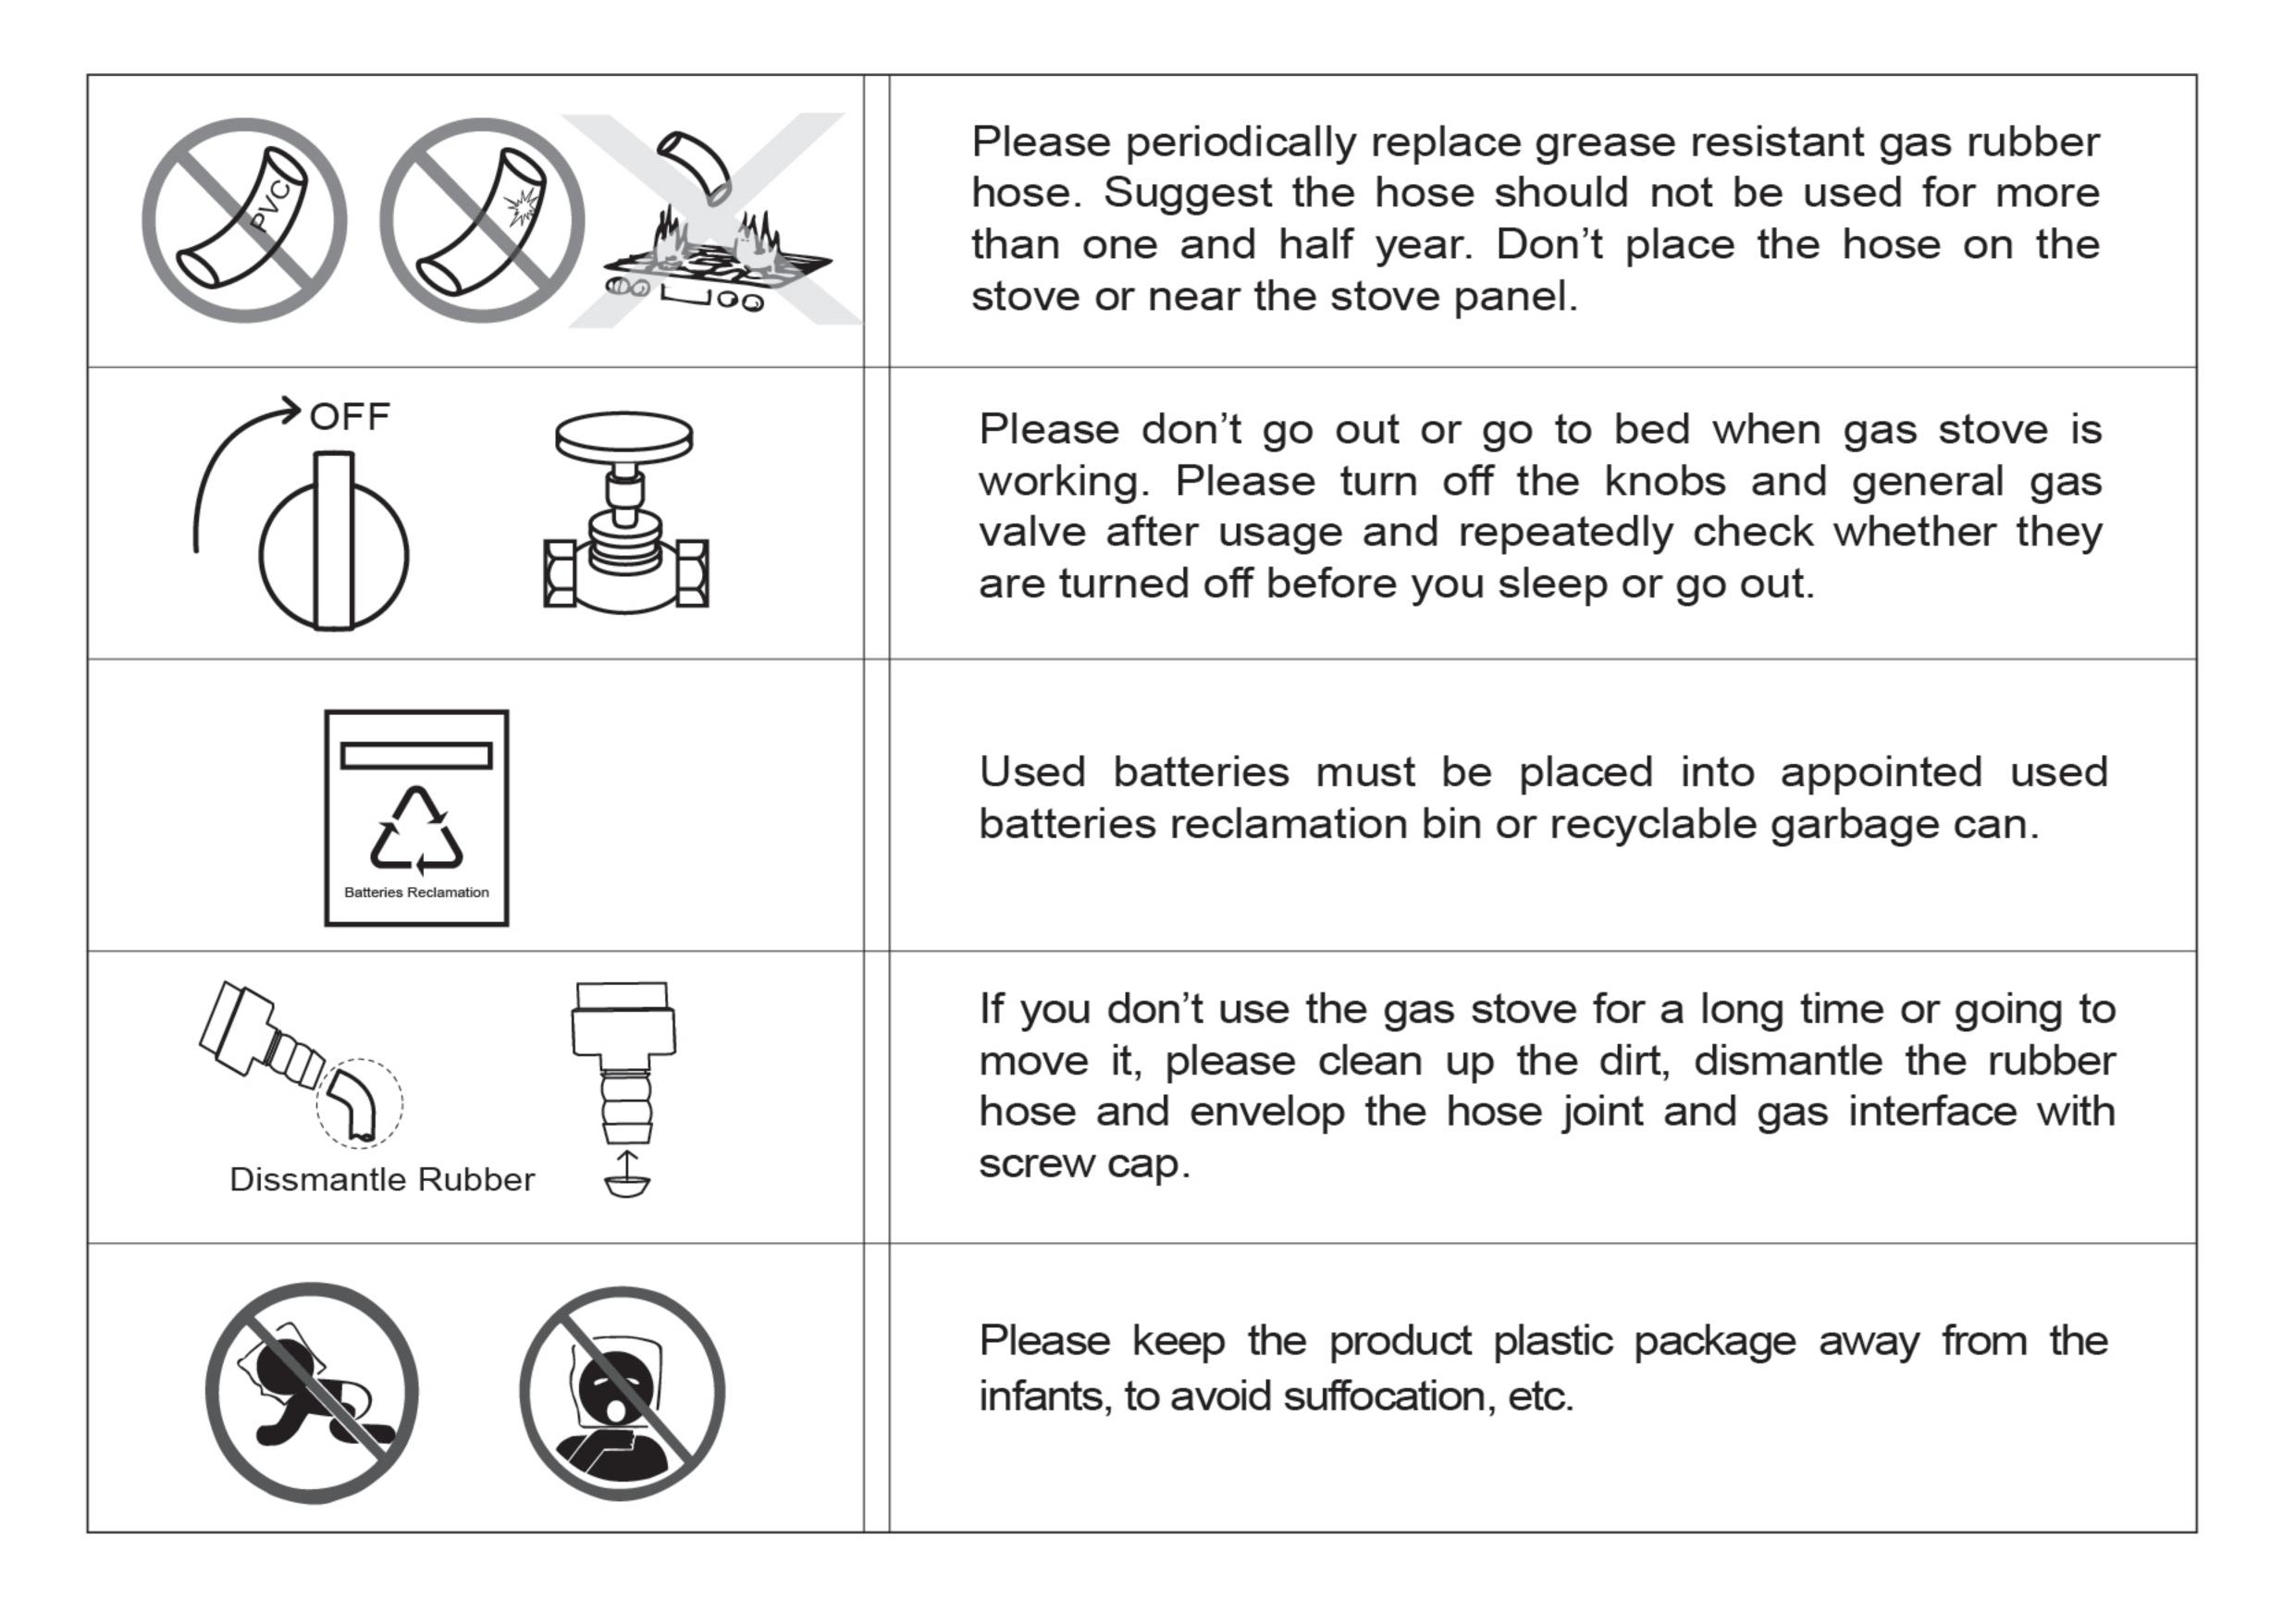

Forbidden

	Please don't dismantle, refit gas stove personally and privitely to avoid gas leak. We suggest fix gas leak alarm.
Gas Type Code	Please confirm the gas type is the same with nameplate indicate before use. It is forbidden to change into other gas type, especially the man-made gas which contains CO.
	The gas stove is for heating cooking untensil, don't use it for drying towels, clothes, etc.
	Please don't turn on the gas stove for heating when there is no pan or there is no food in the pan. It may damage the range hood which is above the stove, even will burn the grease inside of the range hood and cause fire accident.

Forbidden

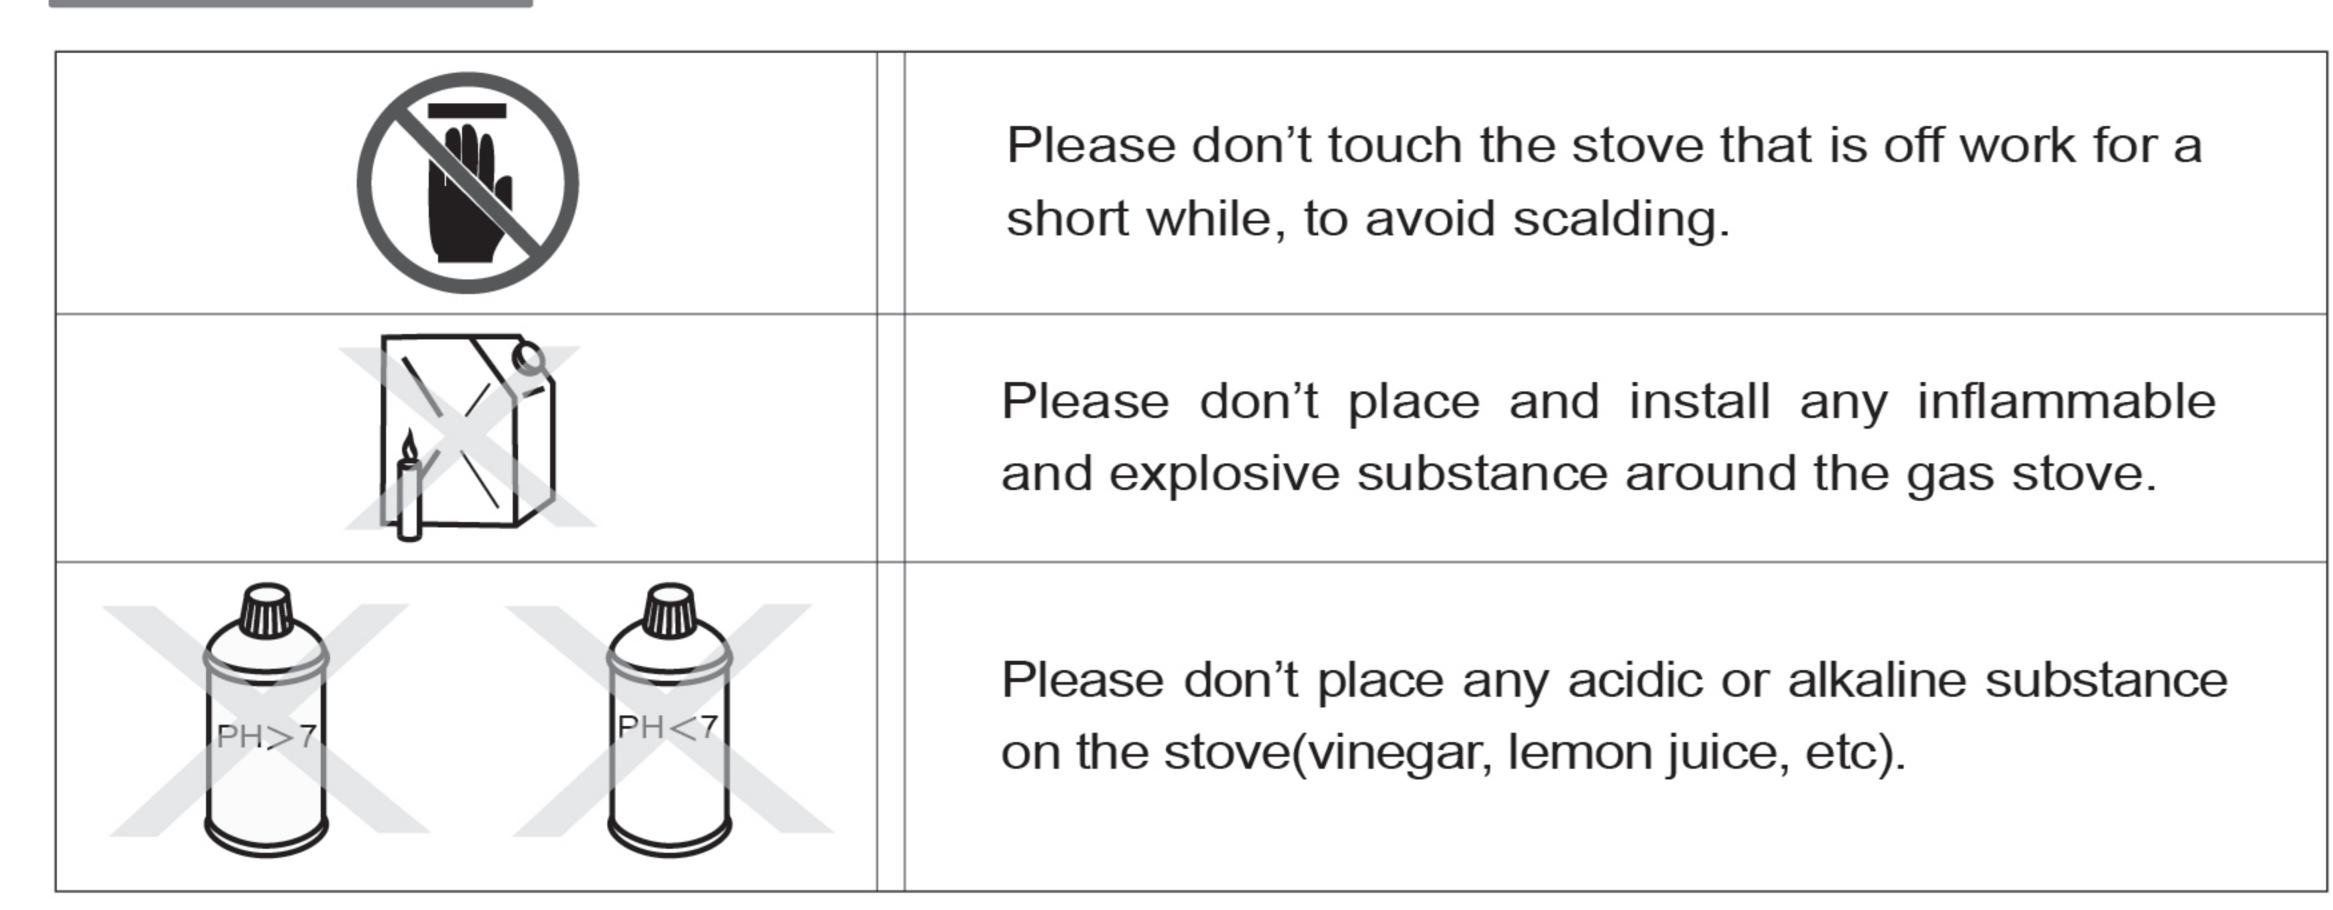





The glass used in FOTILE products is tempered glass, and the tempering mechanism of glass decides that there is extremely small probability for tempered glass self explosion. Once it happens self explosion not due to improper use, we promise to replace the tempered glass free.


Usage


Specification and Structure

GHG88215/GHG78215/GEG30103/GHG78221-i

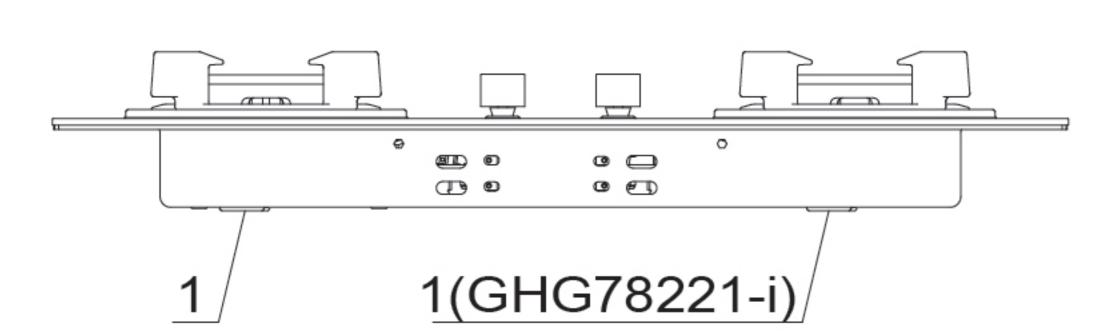

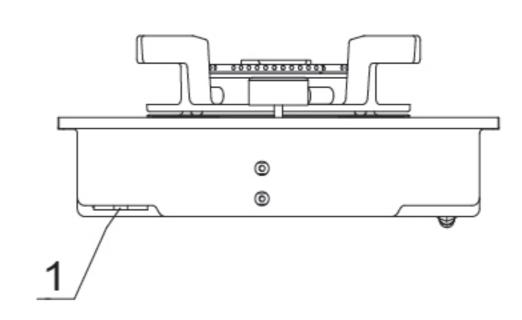


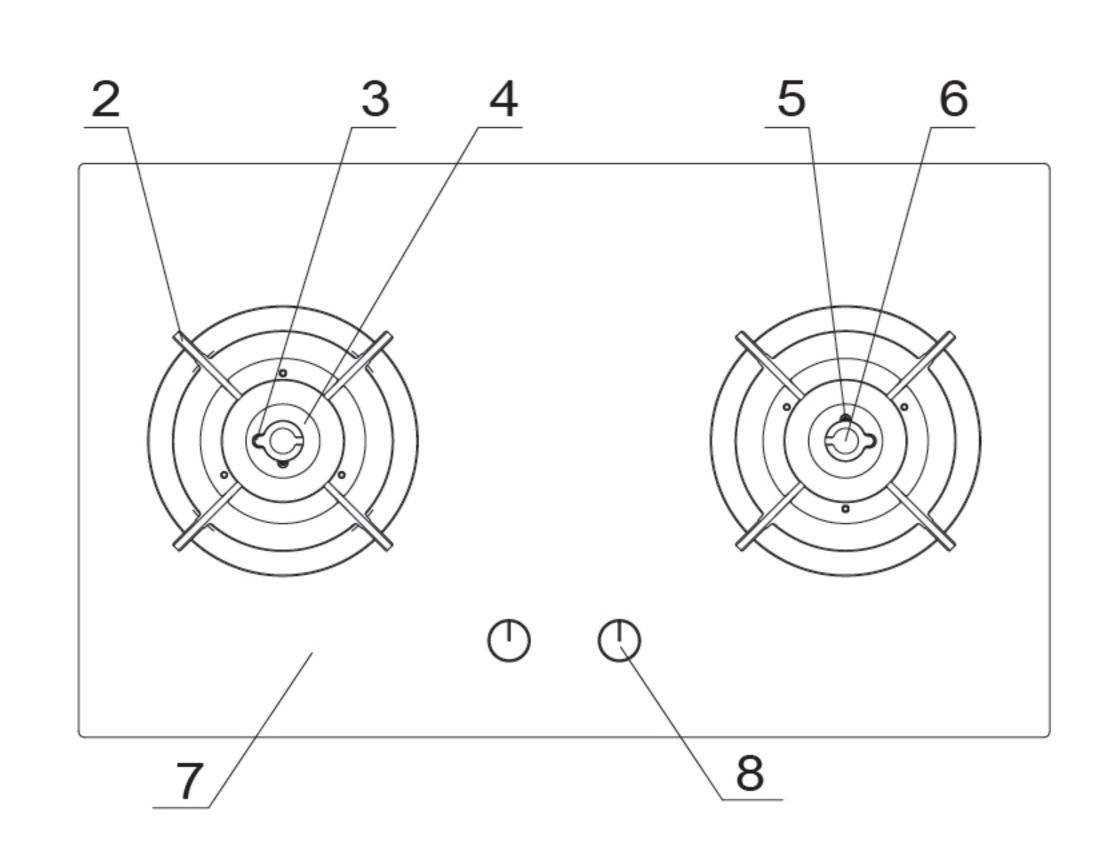


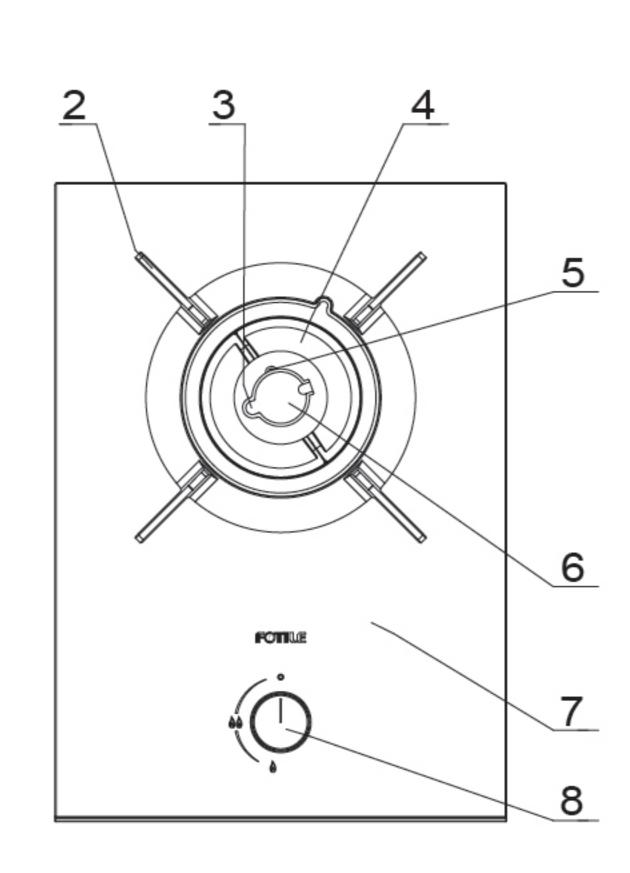

- 1.Battery box5.Thermocouple
 - 2.Pan support ple 6.Internal Flame Cap
- 3.Ignition pin7.Panel
- 4.External Flame Cap 8.Knob


GEG88306/GEG88306-Y

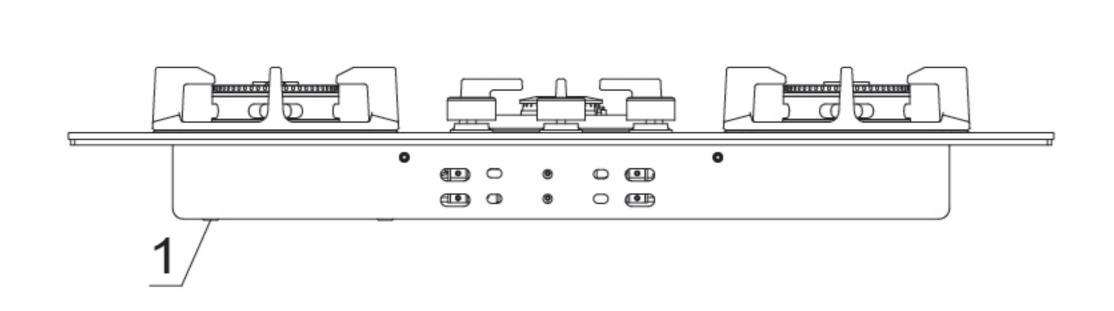


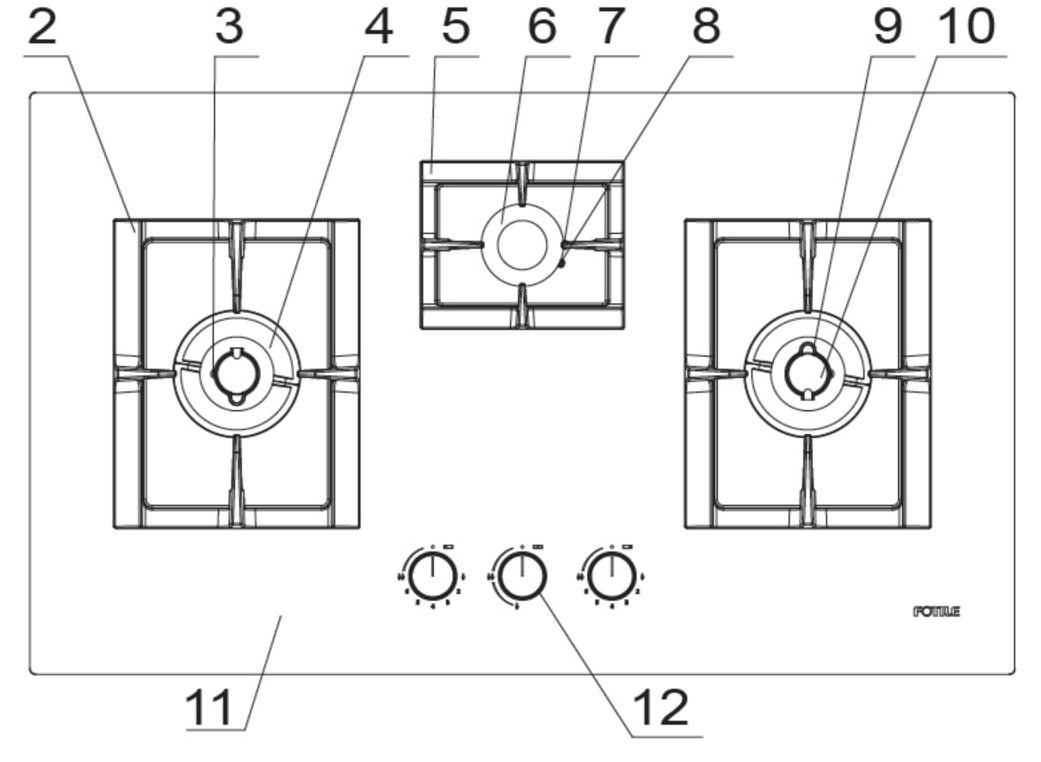

- 1.Battery box
- 4.External Flame Cap(L/R)
- 7.lgnition pin(M)
- 10.Internal Flame Cap(L/R)
- 2.Pan support(L/R) 5.Pan support (M)
- 8.Thermocouple(M)
- 11.Panel
- 3.Thermocouple(L/R)
- 6. Burner Cap(M)
- 9.Ignition pin(L/R)
- 12.Knob

GEG88201/GEG88201-Y

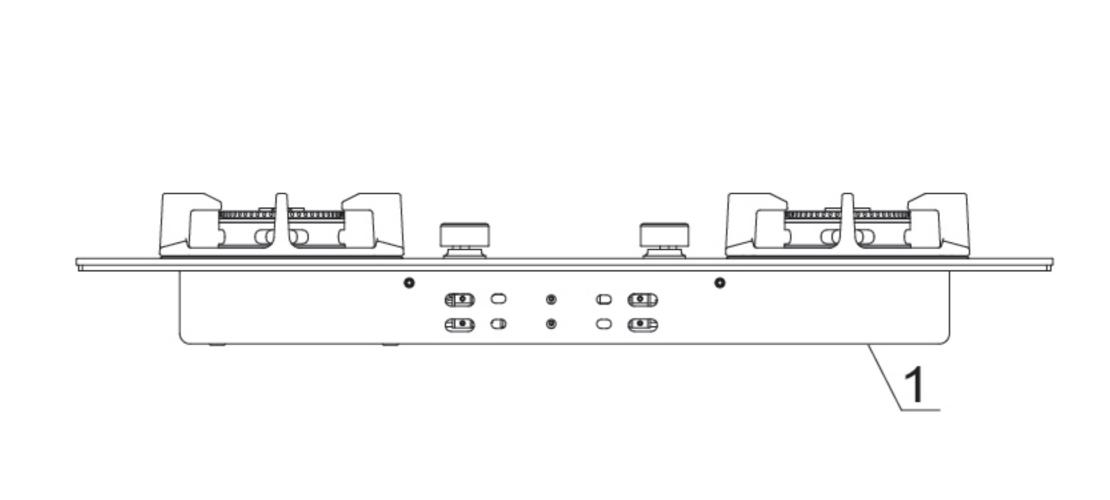

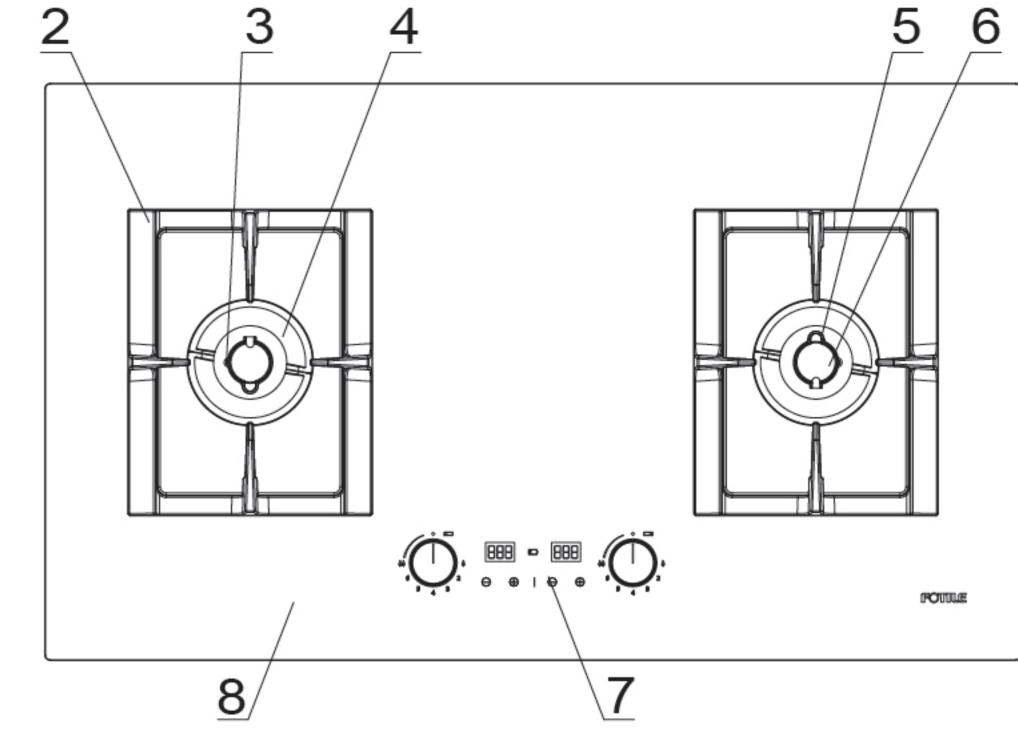



- 1.Battery box
- 4.External Flame Cap(L/R)
- 7.Time module

- 2.Pan support(L/R)
- 5.Ignition pin(L/R)
- 8.Panel

- 3.Thermocouple(L/R)
- 6.Internal Flame Cap(L/R)

GHG86328

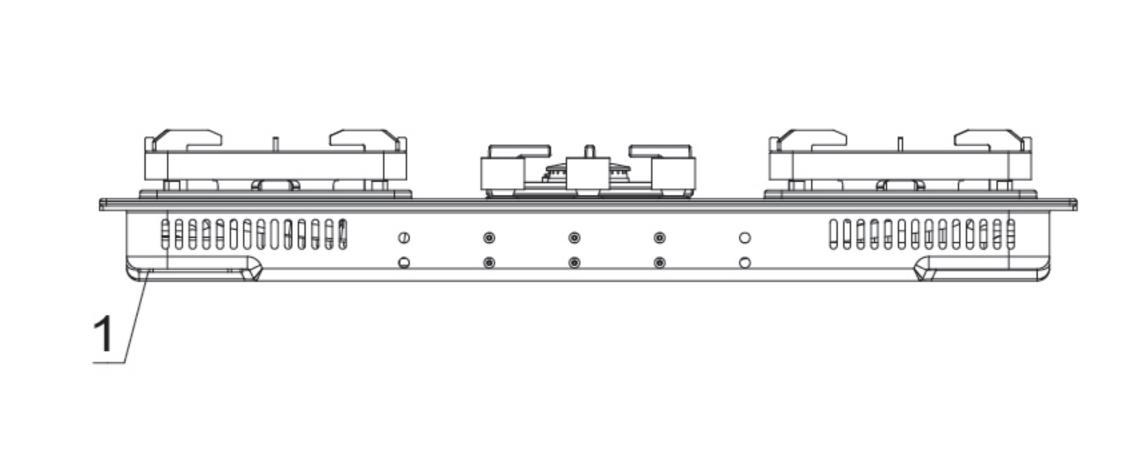

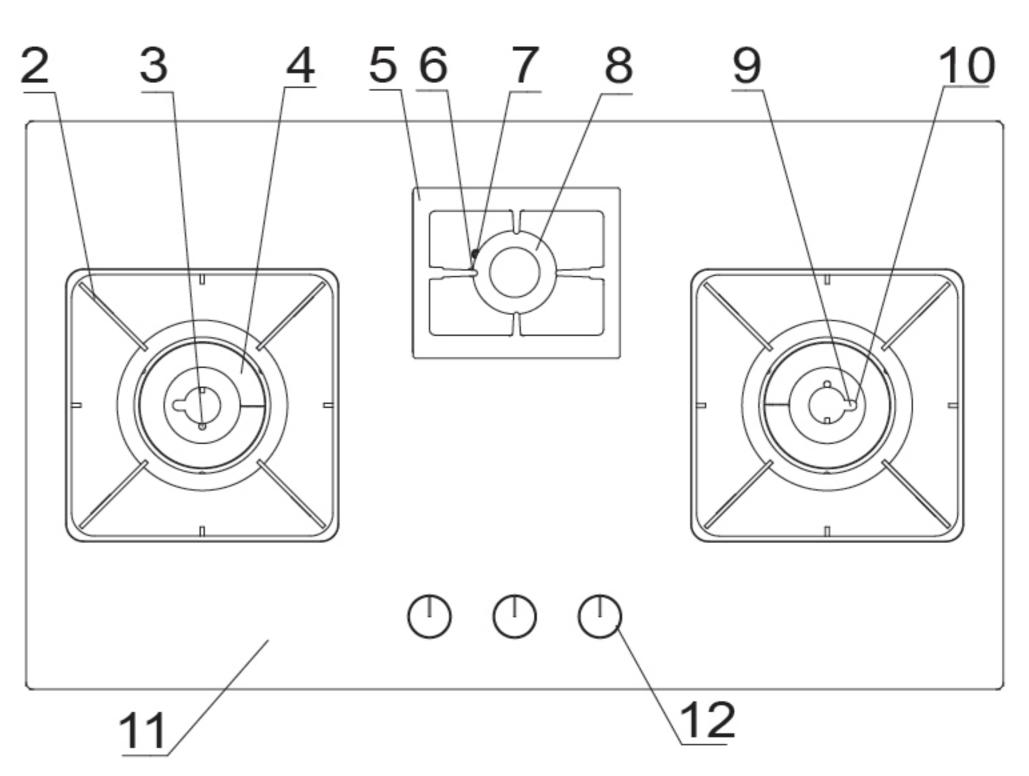

- 1.Battery box
- 4.External Flame Cap(L/R)
- 7.Thermocouple(M)
- 10.Internal Flame Cap(L/R)
- 2.Pan support(L/R)
- 5.Pan support (M)
- 8.Burner Cap(M)
- 11.Panel
- 3.Thermocouple(L/R)6.Ignition pin(M)
- 9.Ignition pin(L/R)
- 12.Knob



NOTE: In this document (M) is short for Middle burner, (L/R) is short for Left/Right burner.




- a.Be careful the pot (pan) is too hot to cause fire when cooking with vegetable oil and animal fat oil. When cooking with such kind of oil, please don't leave it alone after you put the food into the pot (pan).
 - b.The stove will heat when using, please keep it off heating items. Such metal objects as knife, fork, spoon and cover, should not be placed on the stove to prevent heat conduction.


Operation Instruction

There is the operation methods for FOTILE gas stove knob, please refer to Fig.1.


GHG88215/GHG78215



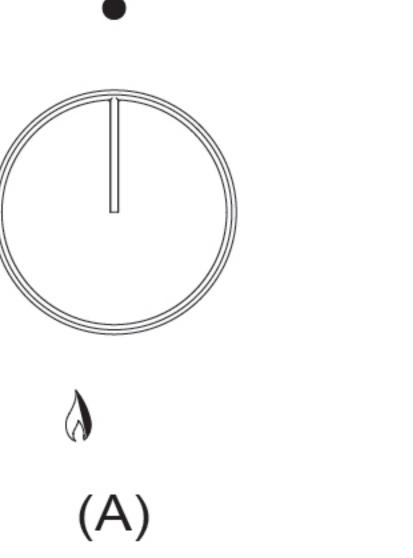


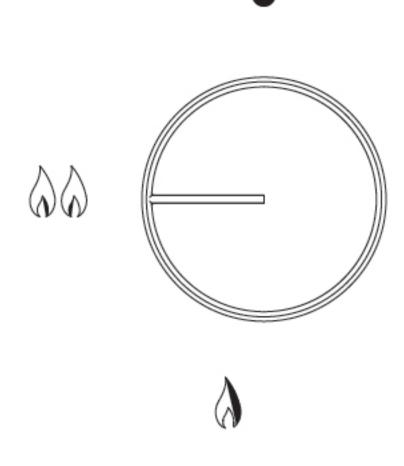

(B)

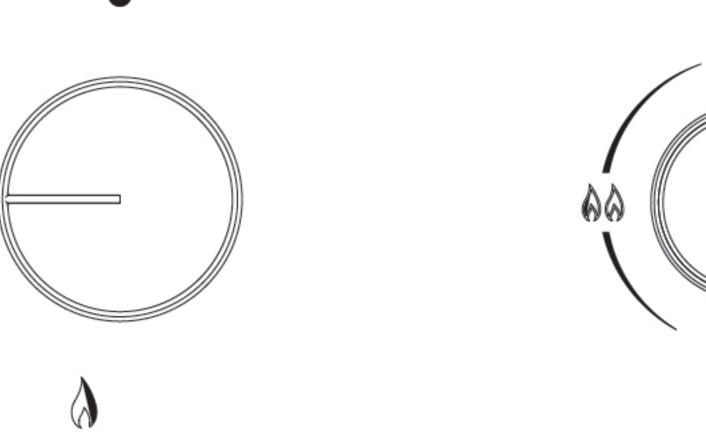





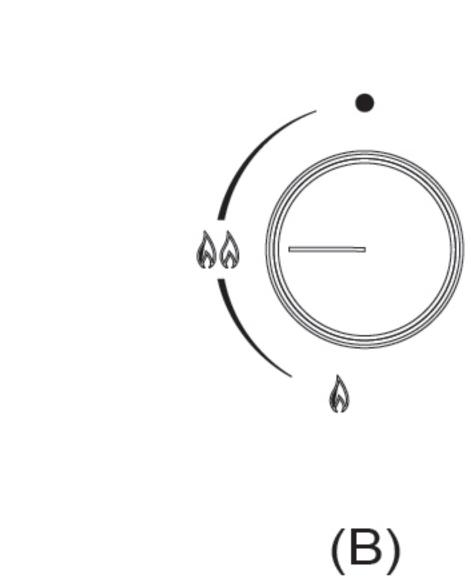



GEG30103/GHG86328/GHG78221-i


GEG88306/GEG88201/GEG88306-Y/GEG88201-Y

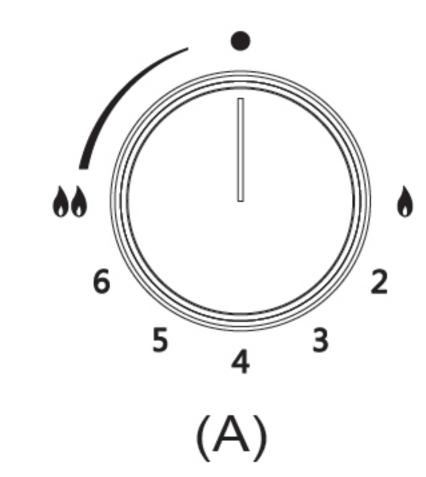

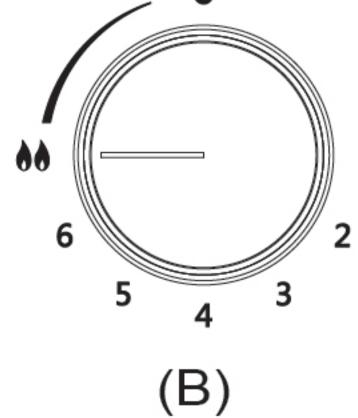

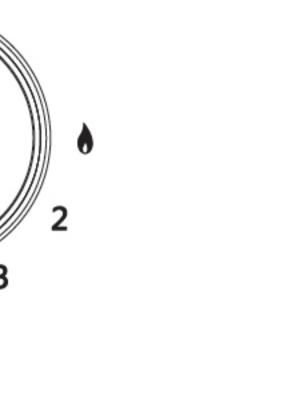

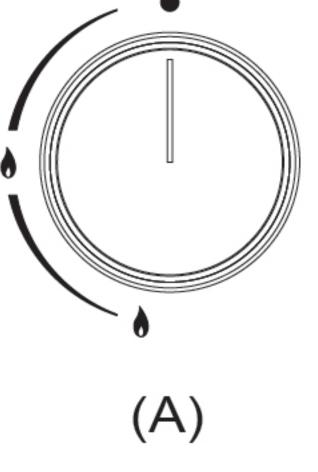

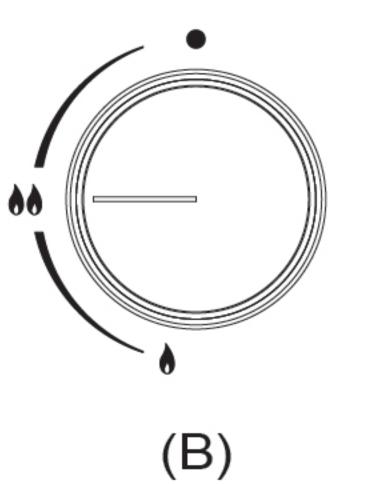

GEG88201/GEG88306(L/R)


GEG88306(M)

Fig. 1


First of all, check whether knobs is in the "●/○" position(refer to Fig.1 A). Then turn on the gas switch, press the stove knobs, contrarotate 90 degrees(refer to Fig.1 B), to confirm the flame is lighing up. If the flame extinguishes after your hand off the knobs, then please return the knobs to "●/○" position, and repeat the above operations.

Fire Adjustment


GHG88306/GHG78215

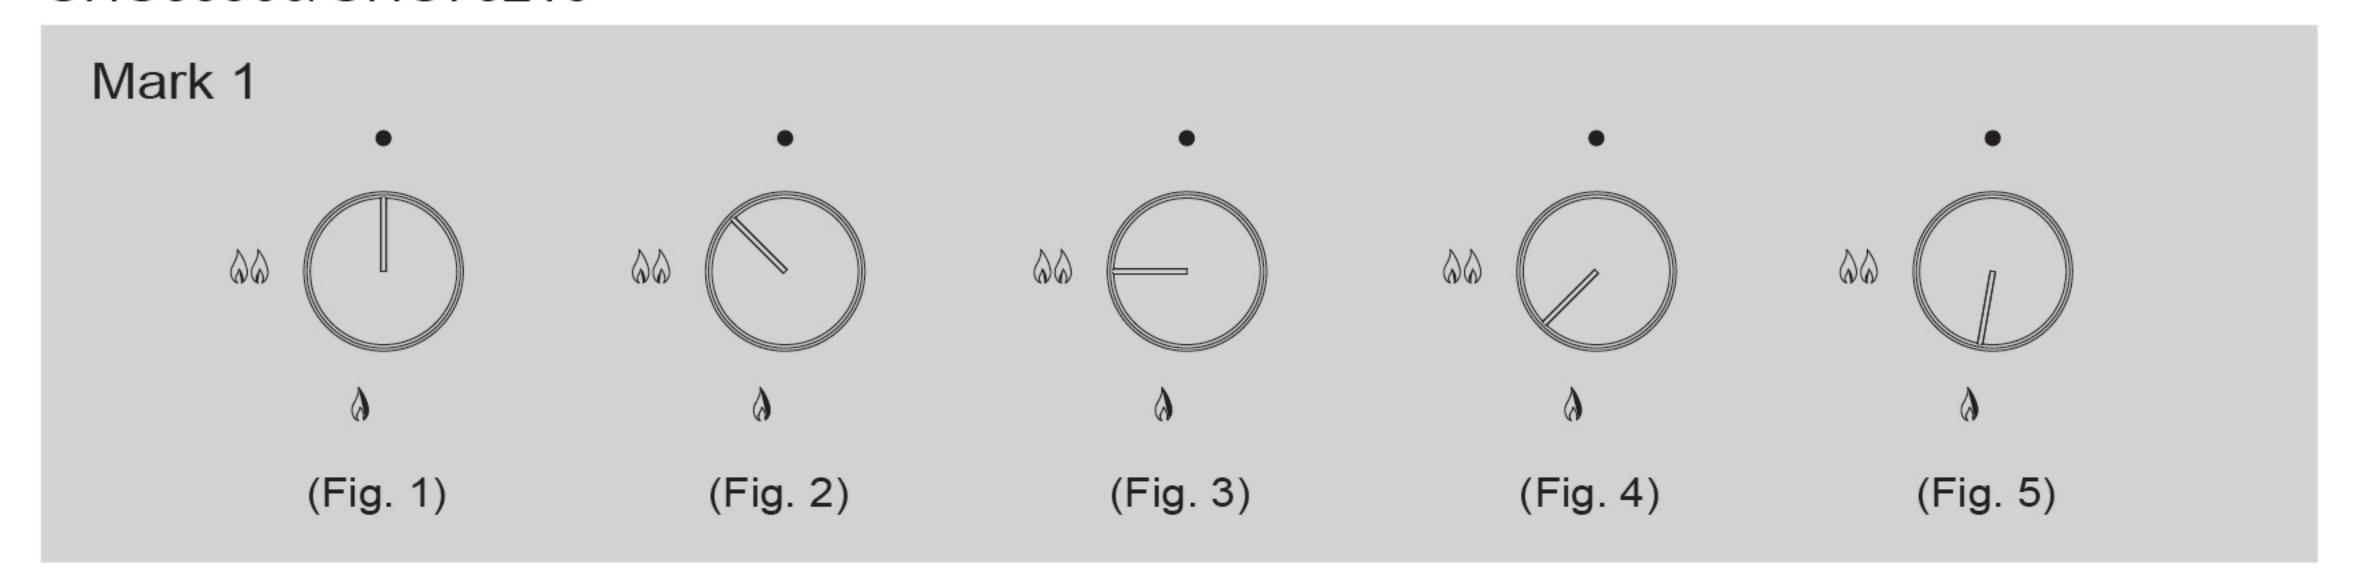


GEG88201/GEG88306(L/R)/GEG88306-Y/GEG88201-Y

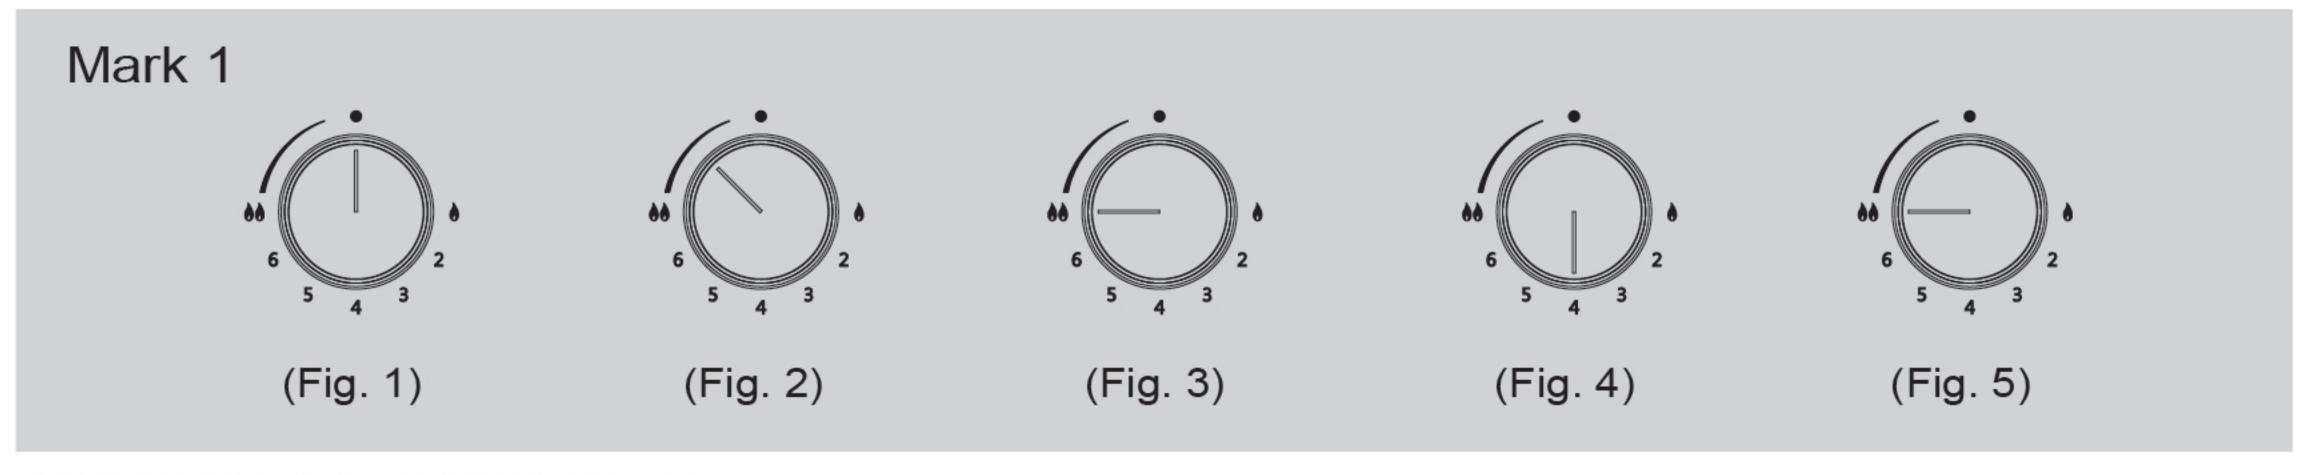

GEG88306(M)/GEG88306-Y

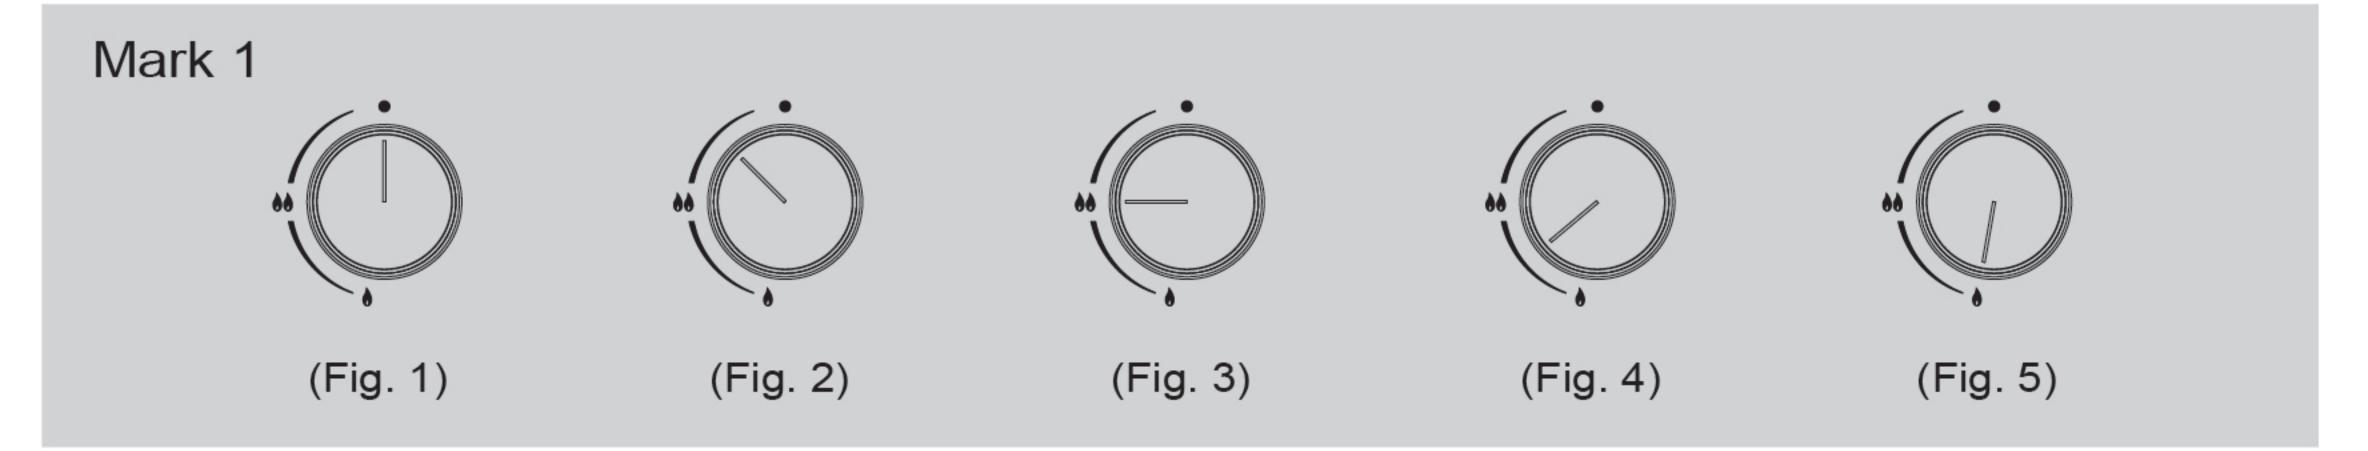

GEG30103/GHG86328/GHG78221-i

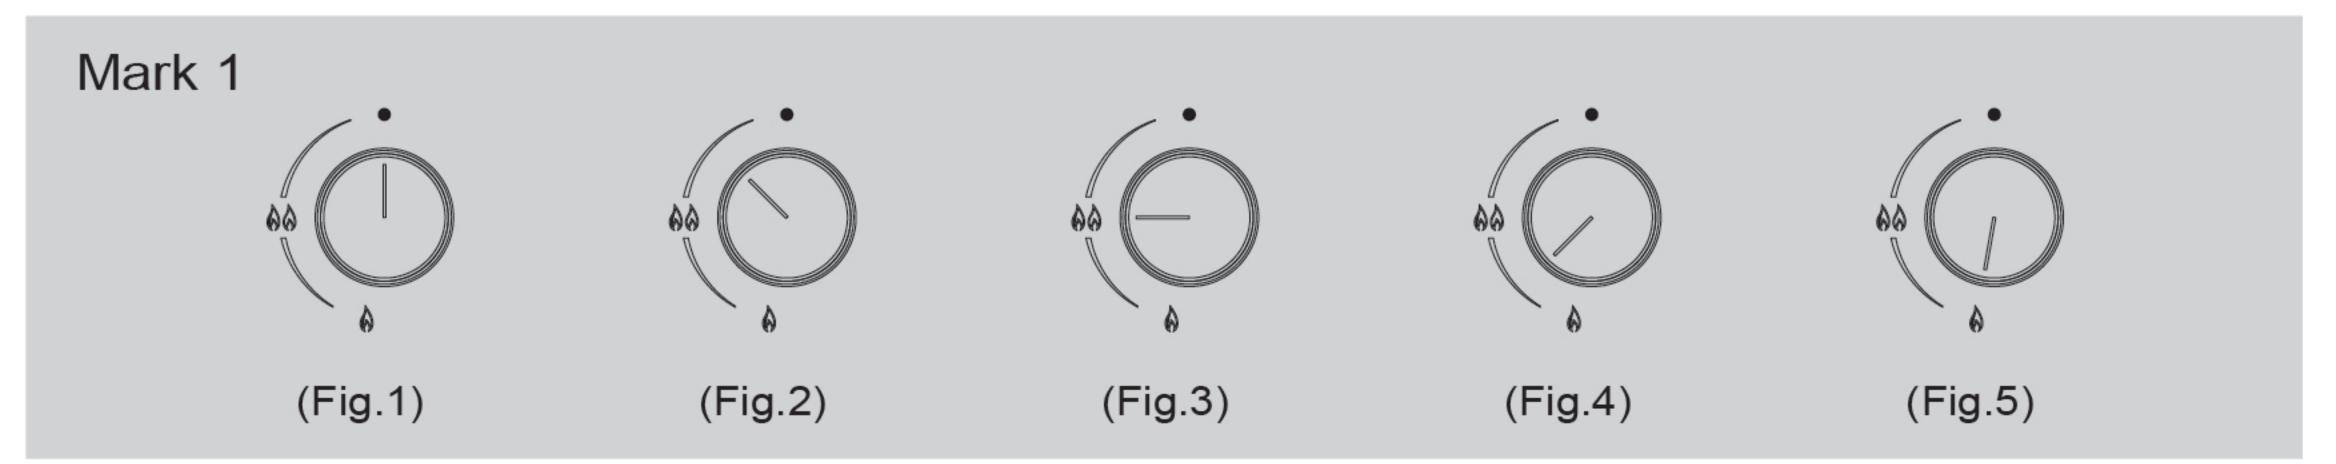

After the flame burning, please comply with Fig. 3 4 5 6 method to turn Mark 1 knob . You can adjust big or small fire according to the demands.

If you need to stop stove working, please clockwisely turn the knob to "●/○" position, then the fire will be extingushed (refer to Fig. 2). Then close the general gas valve.



- a.The flame failure device can prevent the gas leak accident caused by fire extinguishing, which is due to wind blow or soup overbrim. But it can't avoid gas leak due to other reasons.
- b.All FOTILE gas stoves are with flame failure device. Press down the knob when igniting, and anticlockwisely turn to " 🎧 "position (refer to Fig. 4). It is ok if the flame will not extinguish after you loosen your hand, which means the flame failure device is working now. When cooking, if the overbrimed food or blowing wind extinguish the flame accidently, the device will close the gas valve automatically to avoid the gas leaking.



Cookware size limitation

Please choose the proper Pan before cooking.

Burner	Minimum	Maximum	Suitable for wok
GHG78215 GHG88215 GEG88201 GEG88306(L/R) GEG88306-Y(L/R) GEG88201-Y GEG30103 GHG86328(L/R) GHG78221-i	220mm	300mm	Yes
GEG88306(M) GEG88306-Y(M) GHG86328(M)	100mm	220mm	No

Using the hood linkage function

Note: GEG88201 and GEG88201-Y&GHG78221-i Gas Hob has a hood linkage function and can be connected to a specific model of hood that also has this function to achieve on/off control of the hood Use the following methods.

- . Pairing to the hood: pairing method refer to the specific model of hood manual.
- 2. About the control function
- (1)When any cooker knob is turned on, the hood in the online state will automatically turn on.
- (2)When all cooker knobs are turned off, the hood in the inline state will automatically turn off.

Note on timed operation


/!\ Caution: The timing function is only available for GEG88201/GEG88201-Y

(!) Caution: The stove with the timing function is available for delay in turning off the air source. After the air source is automatically turned off, the user needs to reset the knob to the off position. During the use of the timing function, the user shall not leave the place of use to avoid the stove being left unattended.

(1) Caution: The touch button may fail when the panel is stained with oil or water. Please keep the operation interface clean and dry.

Interface

The interface includes two parts: key and display. From left to right in the upper row, there are the 3-digit timing digitrons (unit: minutes) for the left stove, electricity level reminding sign (limited to GEG88201) and 3-digit timing digitrons (unit: minutes) for the right stove. From left to right in the lower row, there are the timing ⊖ button of the left stove, timing ⊕ button of the left stove, timing — button of right stove and timing — button of right stove.

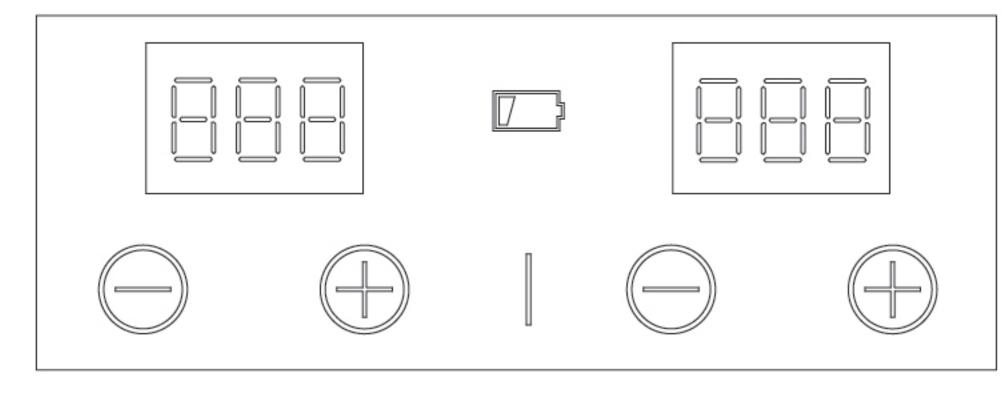

GEG88201/GEG88201-Y


Identification



Timing (+) button: Press and hold this button to activate timing, and when the timing is activated (the digitron flashes), touch it to increase the time by 1 minute, and press and hold it to increase the time continuously, with the maximum time up to 180 minutes.



Timing — button: Press and hold it to activate timing, and when the timing is activated (the digitron flashes), touch it to reduce the time by 1 minute, and press and hold it to reduce the time continuously, with the minimum up to 0 minute.



3-digit timing digitron: To displays the timing of the left and right stoves respectively.

- Timing (with operation of left stove as example)
 - (1) Press and hold the \oplus or \ominus button corresponding to the left stove to activate timing, and the left digitron flashes, with the default timing of 15 minutes.
 - (2) Touch the \oplus or \bigcirc button corresponding to the left stove to adjust the timing.
 - (3) After the timing adjustment is completed, wait for 3 seconds and start the timing, and ⚠ the digitron displays the set time and is on all the time.

Caution: The left stove and the right stove can be timed independently or simultaneously.


- Change of timing (taking left stove operation as an example)
 - (1) Press the ⊕ or ⊝ button corresponding to the left stove to activate timing, and the left digitron flashes, and displays the time remaining in countdown of the left stove.
 - (2) Touch the \oplus or \ominus button corresponding to the left stove to adjust the timing.
 - (3) After the timing adjustment is completed, wait for 3 seconds and start the timing, and the digitron displays the set time and is on all the time.
- Cancellation of timing ((taking left stove operation as an example)
 - (1) Press the \oplus or \bigcirc button corresponding to the left stove to activate timing, and the left digitron flashes, and displays the time remaining in countdown of the left stove.
 - (2) Touch the button to adjust the timing to 00 minutes.
 - (3) Wait for 3 seconds, and the corresponding digitron goes out and the timing is canceled.
- End of timing

When the timer counts down to the last minute, the stove will beep once, and the digitron will switch to 60 seconds countdown. When the timer counts down to 0 seconds, the digitron will go out after the stove beeps for 5 times, and the stove will be turned off. When the stove is ignited, it will continuously operate for 4 hours, and then automatically turned off for protection. After the knob is reset, ignite the stove again and start the next cycle of timing.


Prompt of power level (limited to GEG88201/GEG88201-Y)

When the digitron goes on, it means that the battery level is low and the timing function is invalid. Please replace with two 1.5V alkaline D batteries, and make sure the batteries are indicated with "alkaline batteries" on the shell.

■ Electric wiring diagram (limited to GEG88201/GEG88201-Y)

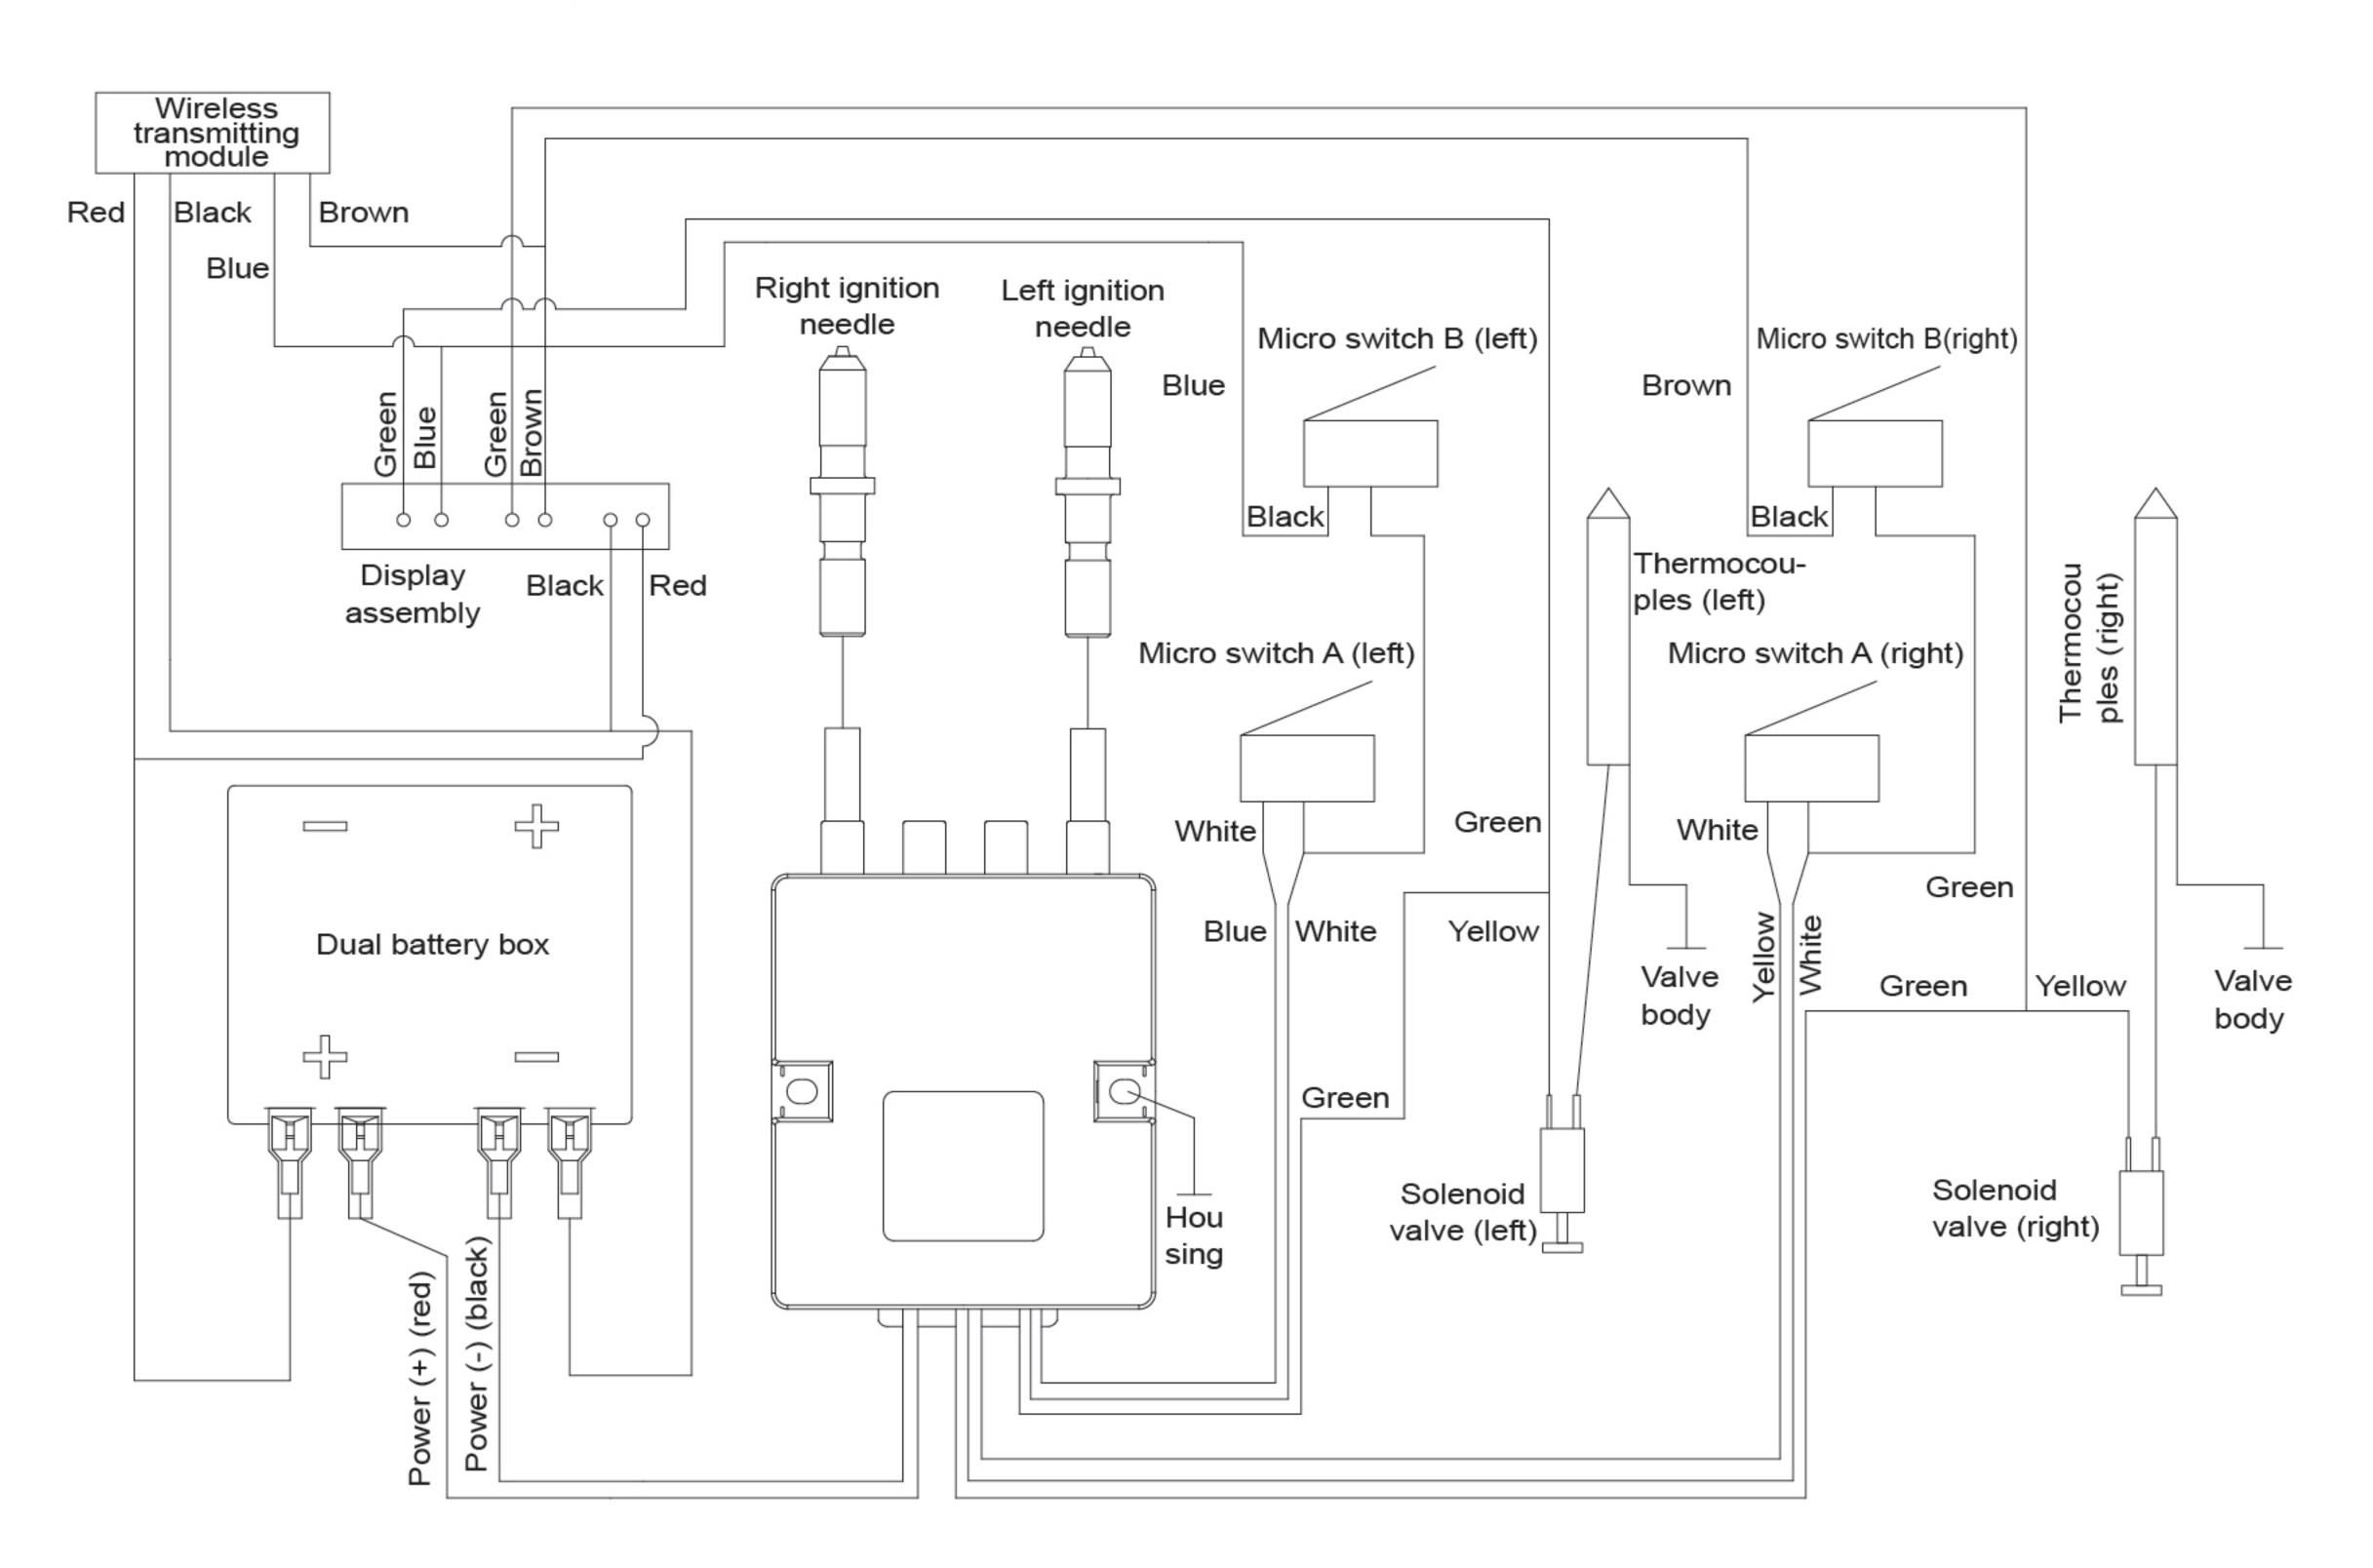


GHG78221-i

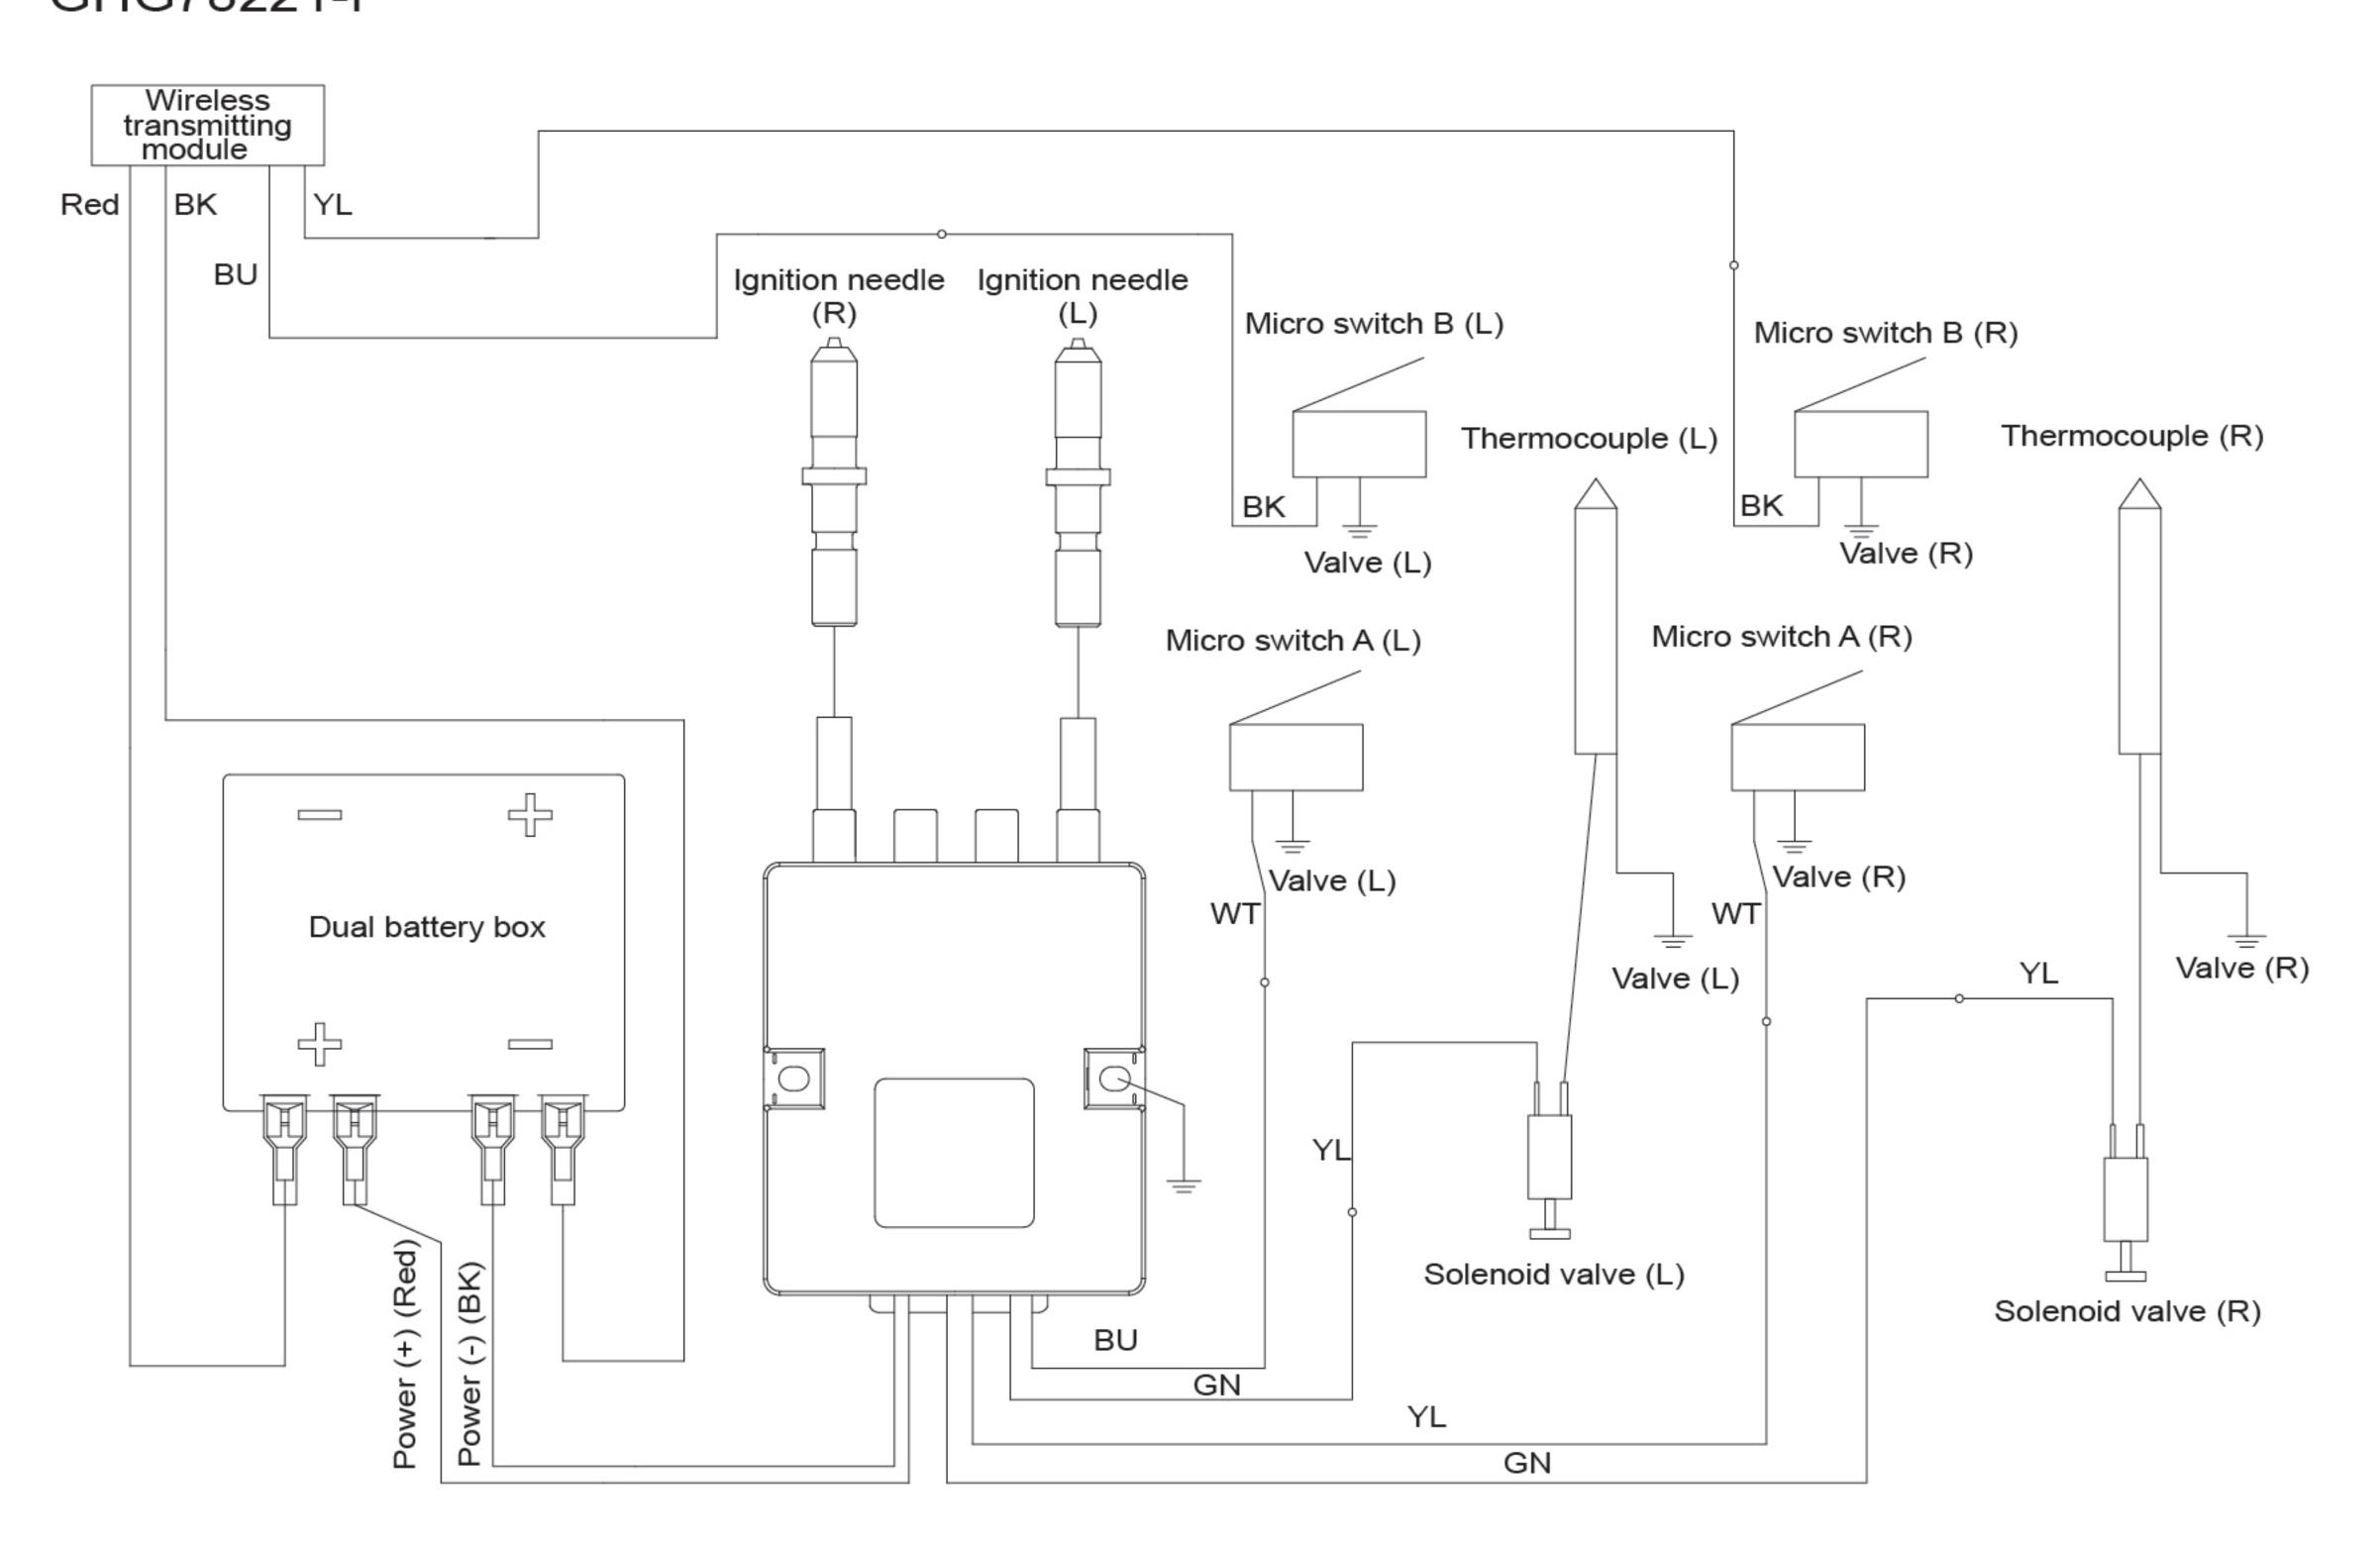

Cleaning and Maintenance

⚠ Notice

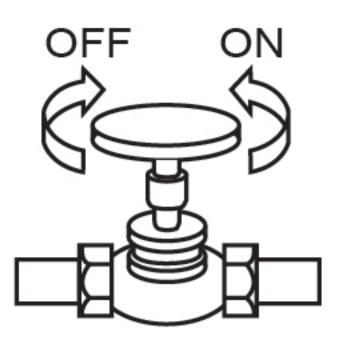

Before cleaning and maintaining the stove, switch off the general gas valve and wait for it cooling down thoroughly.



When you maintain the following, make sure not disassembly the safety device or gas duct parts.




Please contact FOTILE service center if there is abnormity.

Check




The gas link rubber hose must be reliable and avoid any cracks; once you find gas leak, please stop using at once and replace it in time.




Burners, flame caps and pan supports shall be correctly positioned.



Please don't stack the inflammable around the gas stove.



The flame should not be irregular.



Never let the spilth block the burner. Make sure there is no food residua, foreign matter and water touch the ignition and thermocouple head.




Check the interfaces with suds frequently to avoid gas leak.



Please don't wipe the stainless steel panel with sharp material like steel wire ball, etc.
It will greatly shorten the stove lifespan.

Maintenance

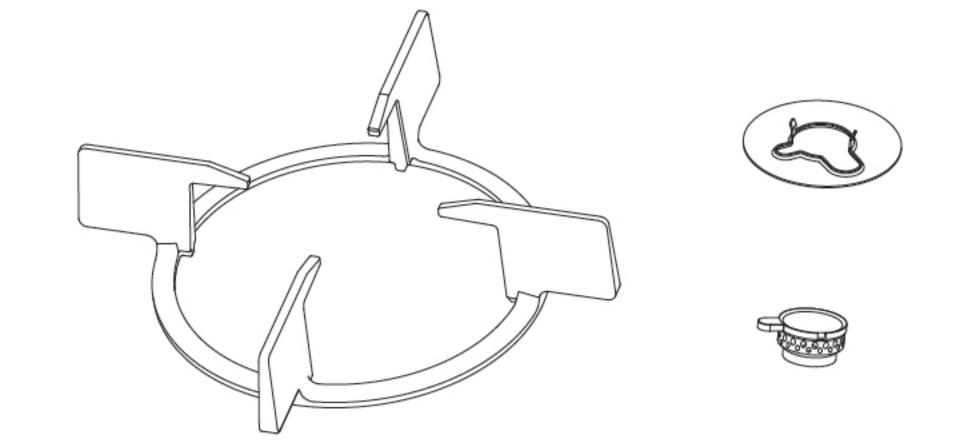

1.Before cleaning, please take down the pan supports and flame caps.




 Movable parts of burner like copper flame cap must be washed with warm water and neutral cleanser frequently. Remove the nugget and dry it, then use the stove.



Neutral

3.Please use neutral cleanser which is without corrosiveness, to clean the stainless steel panel and burner. Never use chlorine-base cleanser to clean glass.

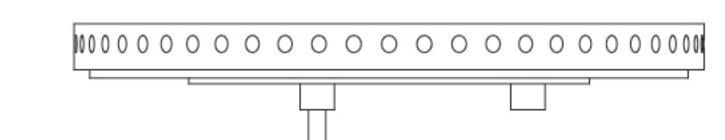

4.Make sure that there is no carbon in the firehole, and no jam.







5.Please don't use such aculeated articles as graininess abluent (putty-powder), clean ball, knife, etc. to clean the residua stubborn besmirch in the burners. Otherwise, it will make the kitchen countertop go wrong or fray the assembly surface, then influence stove lifespan.



6.After cleaning, dry them well and install them correctly.

Normal Malfunction and Trouble Shooting

Malfunctions	Possible reasons	How to solve	
	Forget to open the general gas valve	Close the stove knob and open the general gas valve, then ignites	
	There is air mixed in the gas pipe	Ignite repeatedly until the air is absolutely ducted	
	Rubber hose bend or stave	Unbend or replace the rubber hose	
	The ignition pin electrode and electrical insulator are not clean and become damp	Clean it with dry cloth	
It won't fire	Safety valve is not opened	Press the knob to the utmost and turn it to "^\" position, to make sure the burner is ignited, and stably press for 3-6 seconds, then loose the hand	
	Electron spark is weak, battery power is not enough, loose contact of battery positive and negative charges or opposite fix the battery	Replace the battery or refix the battery	
	Ignitor failure or ignition pin electrode is not in the right place	Please contact the FOTILE service center	
	Rubber hose is chapped or uncorked	Please contact the FOTILE service center to replace the rubber hose	
Gas leak	The joint haven't well connected with rubber hose or other hoses	Correctly connect and check the gas tightness in the hose joint	
Unstable flame	Run out of the liquefied gas	Replace a new liquefied gas cylinder	
long and short flame,yellow flame Not cover the flame cap correctly, there is carbon in the firehole or being jammed with dirt		clean the firehole and wipe off the dirt, to make sure the right position of flame cap	
Incidentally, there is red fire	Under a certain climate, the gas is with much humidity.	The calcium in the water make the red fire, don't worry	



If the gas stove still can't work after getting rid of the above malfunctions, please contact FOTILE service center.

11

Installation

Packing List

	Complete Appliance	1	Dalkaline battery (0)	D battery(alkaline batteries are recommended. 2 battery for GEG88201and GEG88201-Y &GHG78221-i)	1
CALL STOLE CALL S	User Manual	1		Rubber Hose Buttons	2
	Warranty Card	1		screw	4

Note: The GEG30103/GHG86328 are not configured with screws

Installation Methods

/!\ Attentions:



Please don't install the gas stove above the kitchen appliance in poor Execute Strictly ventilation environment. Please make sure the gas pipe, which is connected with gas stove, can't touch any active parts in the cabinet.




Before installation, please check whether your family use gas type is the same as the gas type printed in stove nameplate. Any doubts, please contact FOTILE distributor or service center soon.


- 1.The stove should be installed into durable and horizontal kitchen countertop. For the hole size on the countertop, please refer to the installation diagram (Fig. 7, 8) and specific specification. Make sure the distance from the inflammable matters must be greater than 150mm, and from noncombustible matters greater than 50mm.
- 2.The distance from FOTILE range hood to FOTILE stove surface should be 650mm to 750mm. If there are other suspenders in the above, the distance from FOTILE stove surface to suspenders should be 1000mm.


- 3.Please cut out a blowhole about more than 1500mm² (equivalent to 3 circular holes with diameter of 80mm) which is in the kitchen cabinet facade and stove underpart, to keep the normal ventilation inside and outside the kitchen appliance, otherwise, it will cause the explosion due to gas leak and deposition.
- 4. The battery box is at the bottom of the stove, please fix a D battery in the right direction pole. (please refer to page 4: Specification and Structure)
- 5.Gas rubber hose fixing: (suggest the rubber hose length 1-2 meters)
- (1)Buckle the rubber hose button to the hose, then hitch the hose to stove's air intake joint, till the red mark, and tightly constrict the rubber hose button.
- (2)Leak test: smear the joint part with tenuous and neutral cleanser(eg.soap subs), and open the general gas valve, if there is air bubble, please close the general gas valve soon, and repeat the action (1) and (2) until there is no air bubble.
- (3)If your family gas type is cylinder liquefied petroleum gas (LPG), please choose the qualified pressure reducing valve which is for family use. The gas pressure is 2800±500Pa.



If using the metal soft hose, please fix it according to metal soft hose user manual.

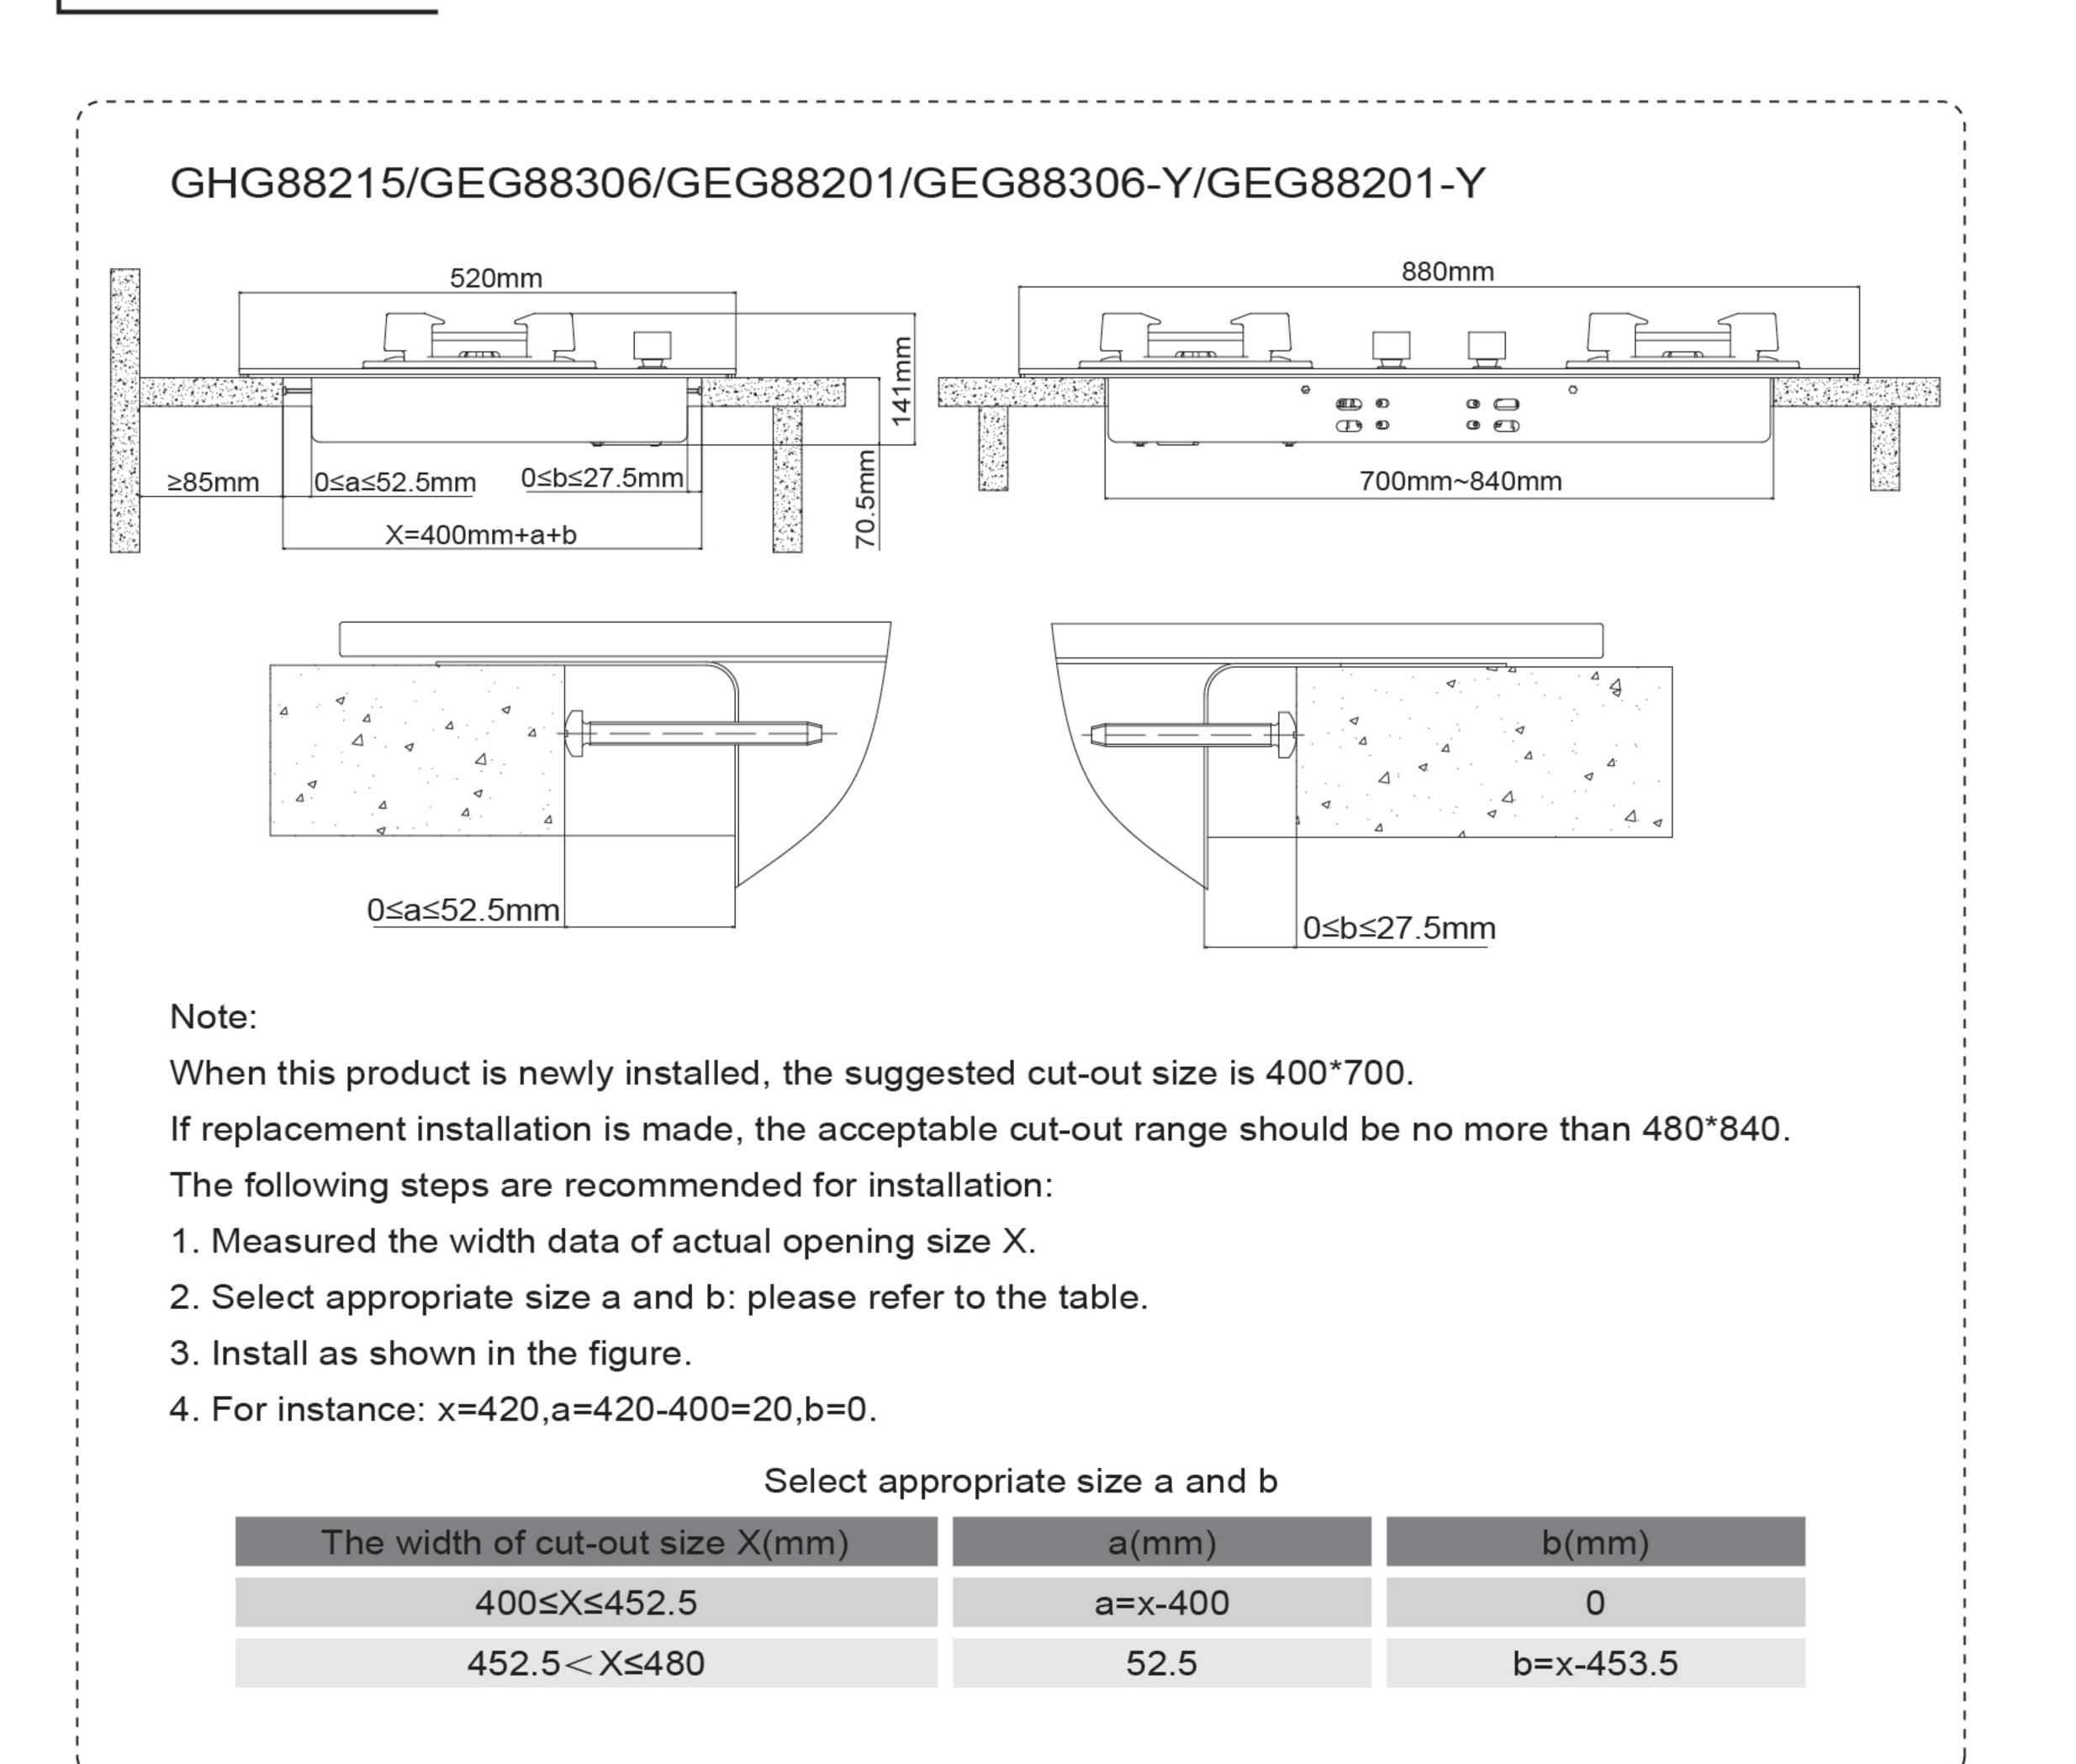


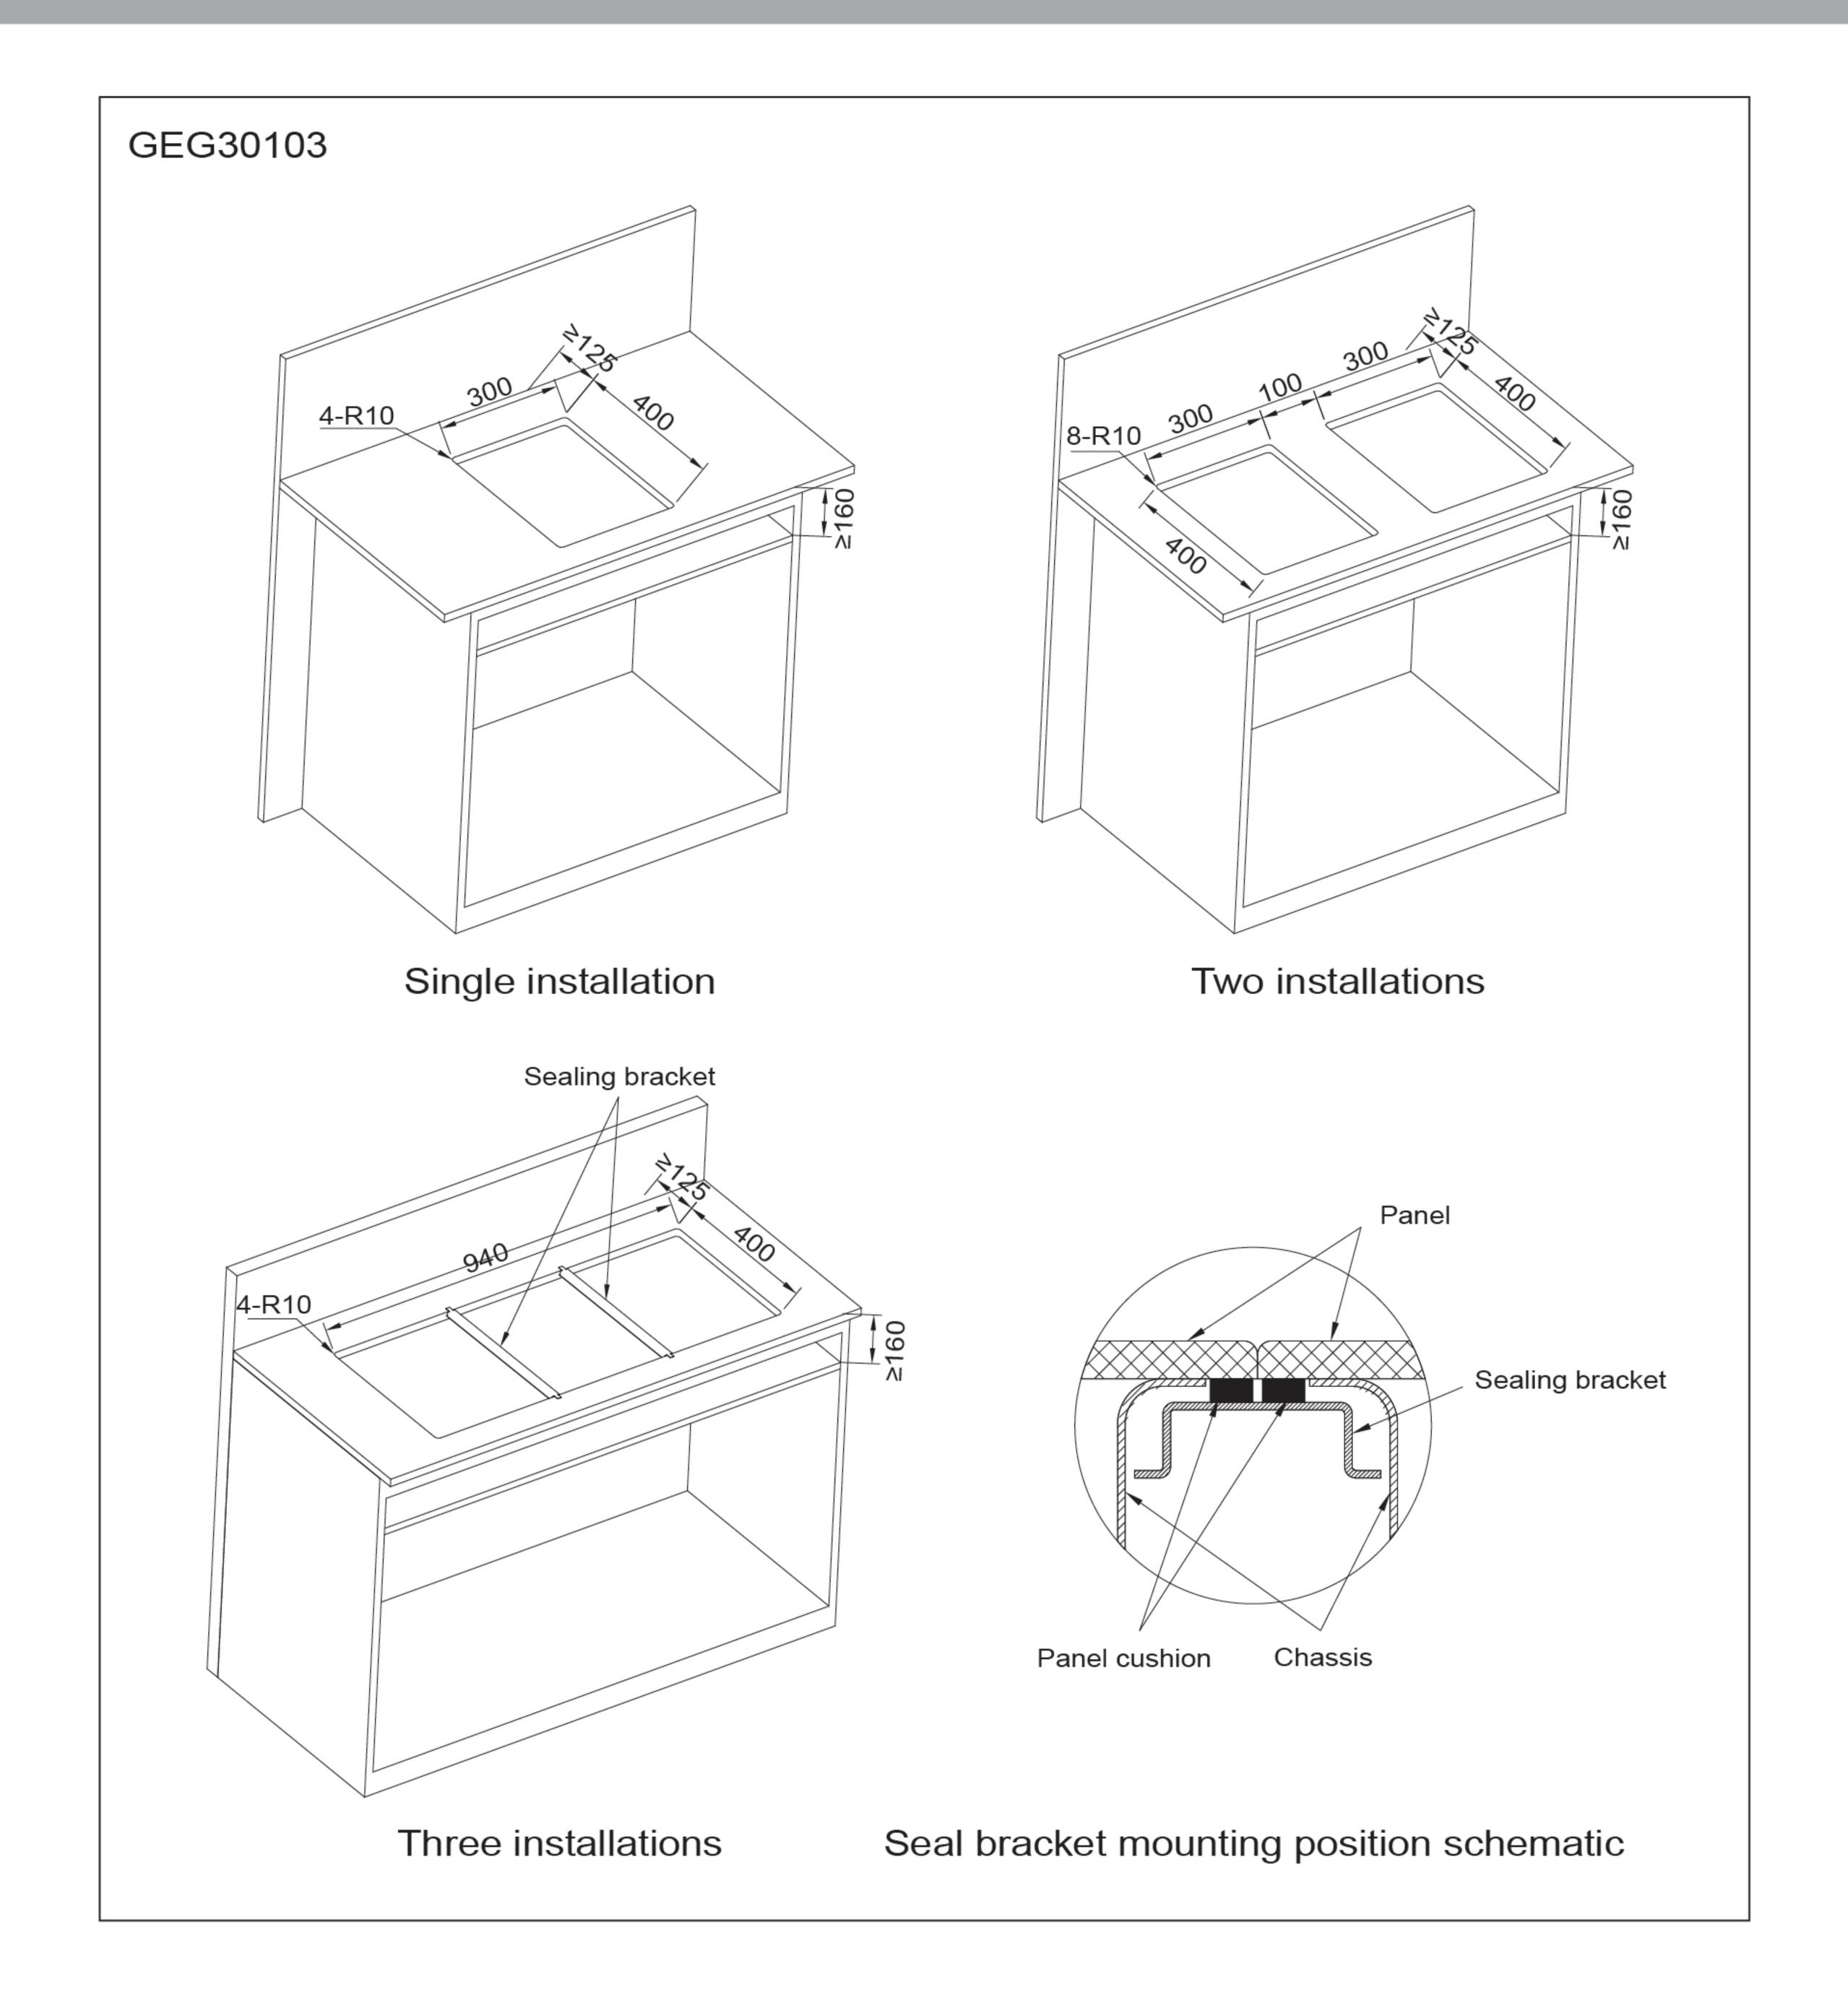

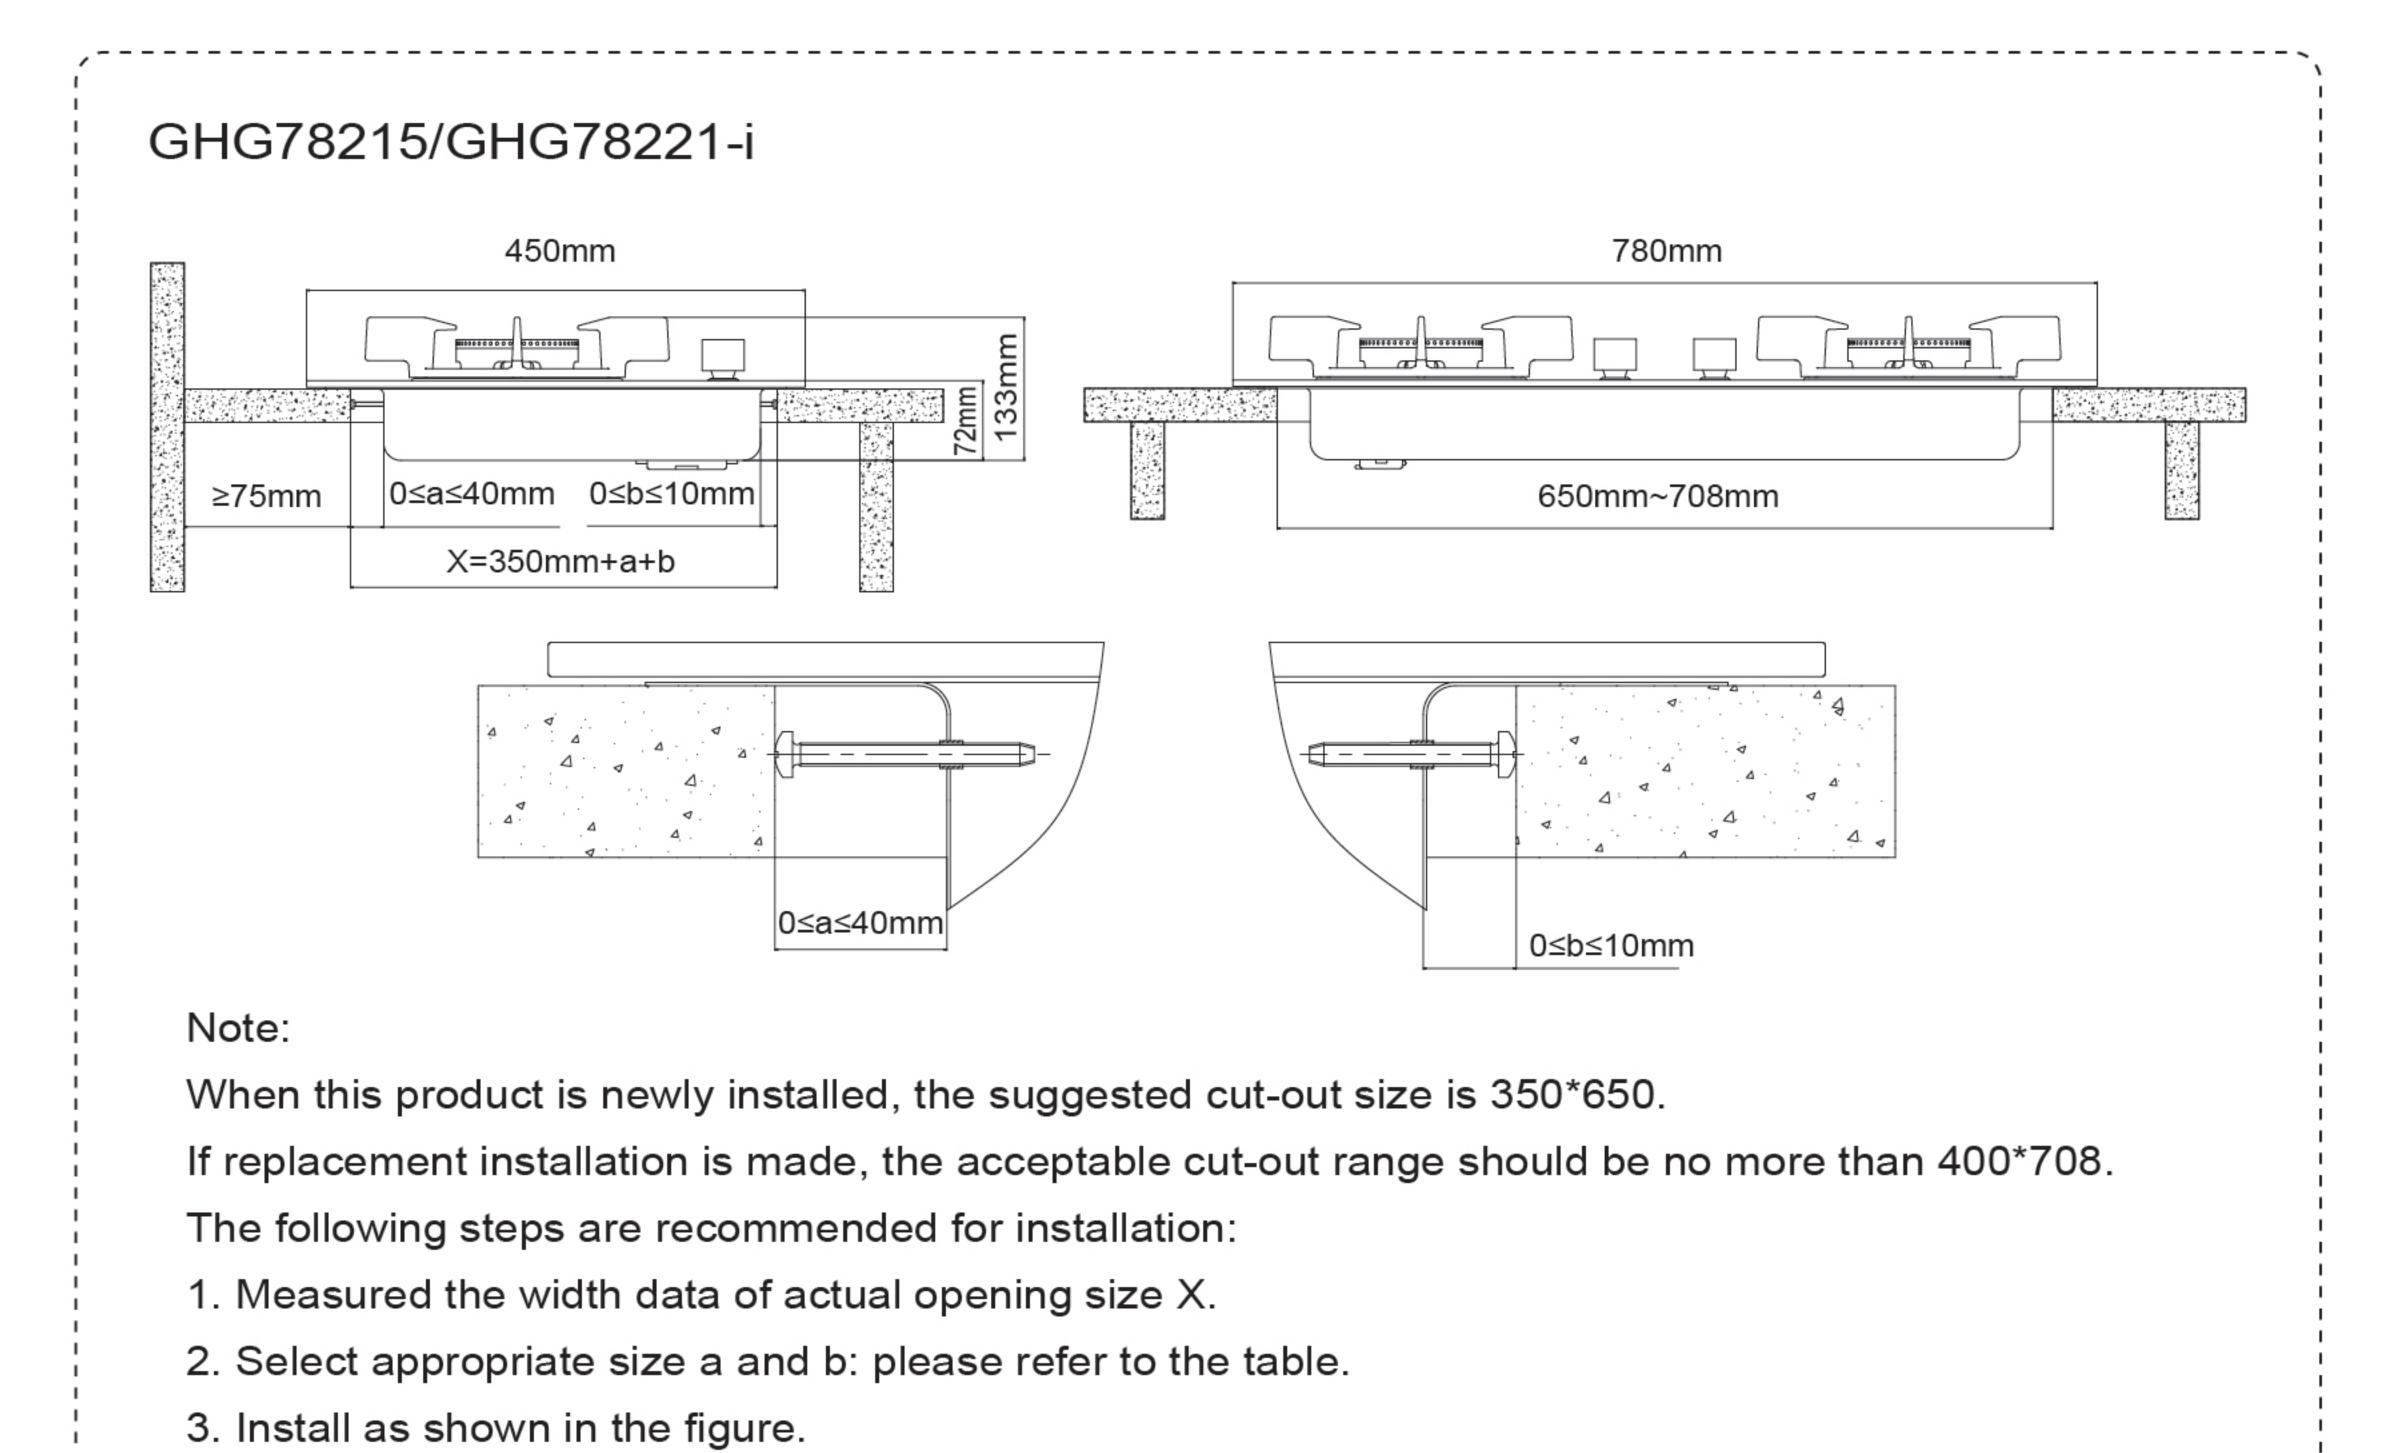

The width of cut-out size X(mm)	a(mm)	b(mm)
350≤X≤390	a=x-350	0
390 <x≤400< td=""><td>40</td><td>b=x-390</td></x≤400<>	40	b=x-390


Select appropriate size a and b

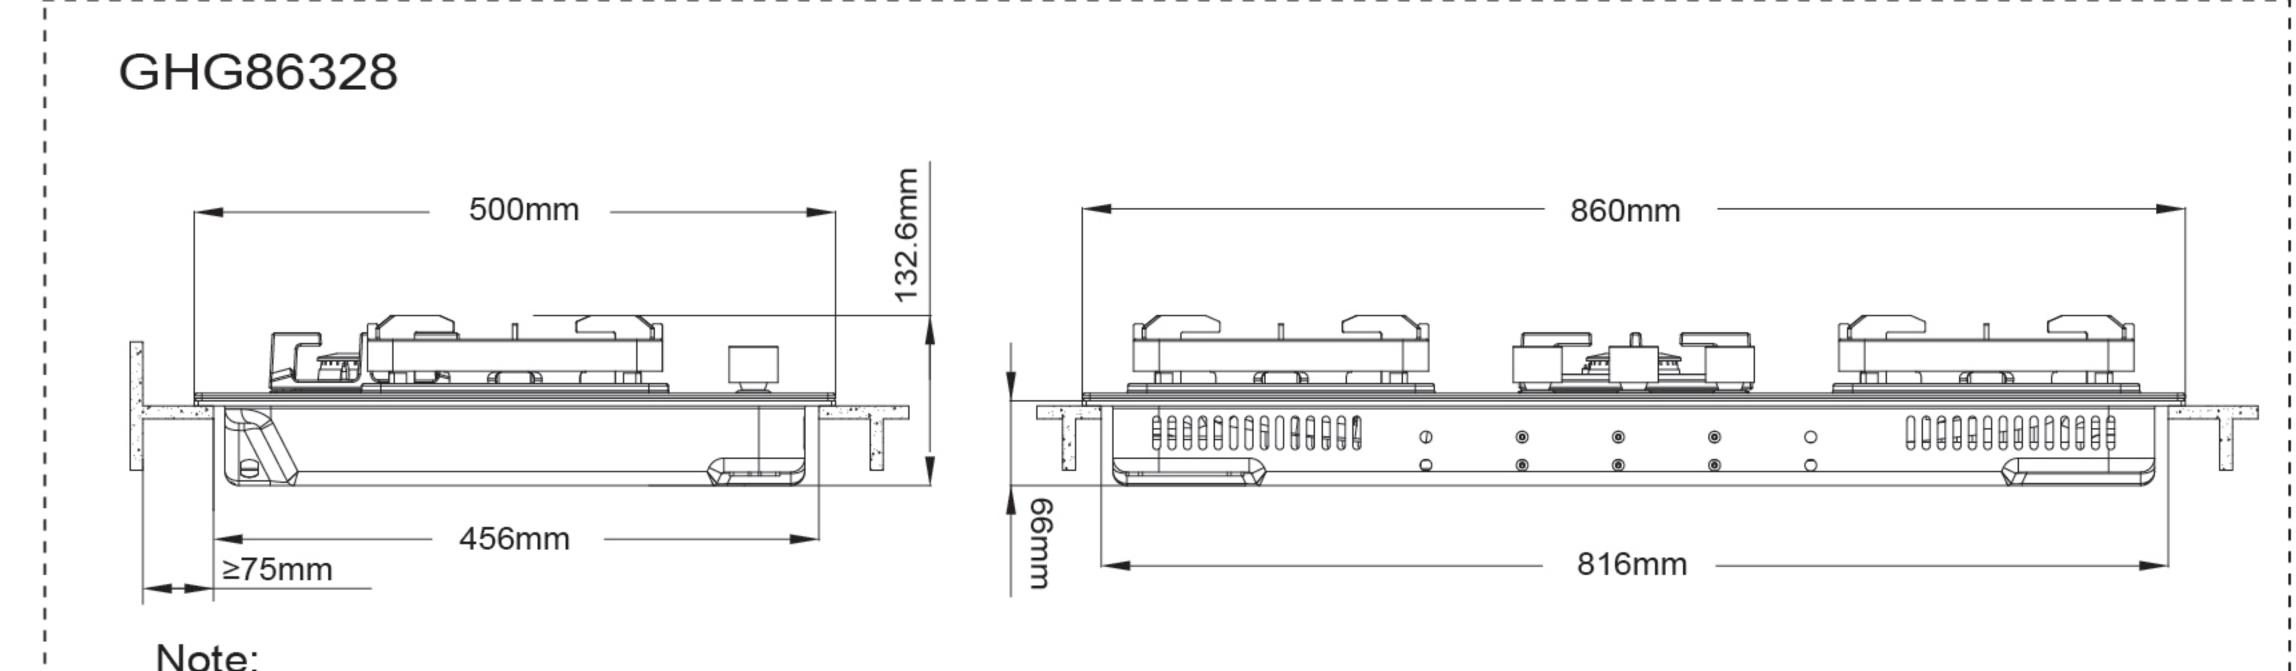

When this product is newly installed, the suggested cut-out size is 456*816.

4. For instance: x=370,a=370-350=20,b=0.

If replacement installation is made, the acceptable cut-out range should be no more than 466*826.

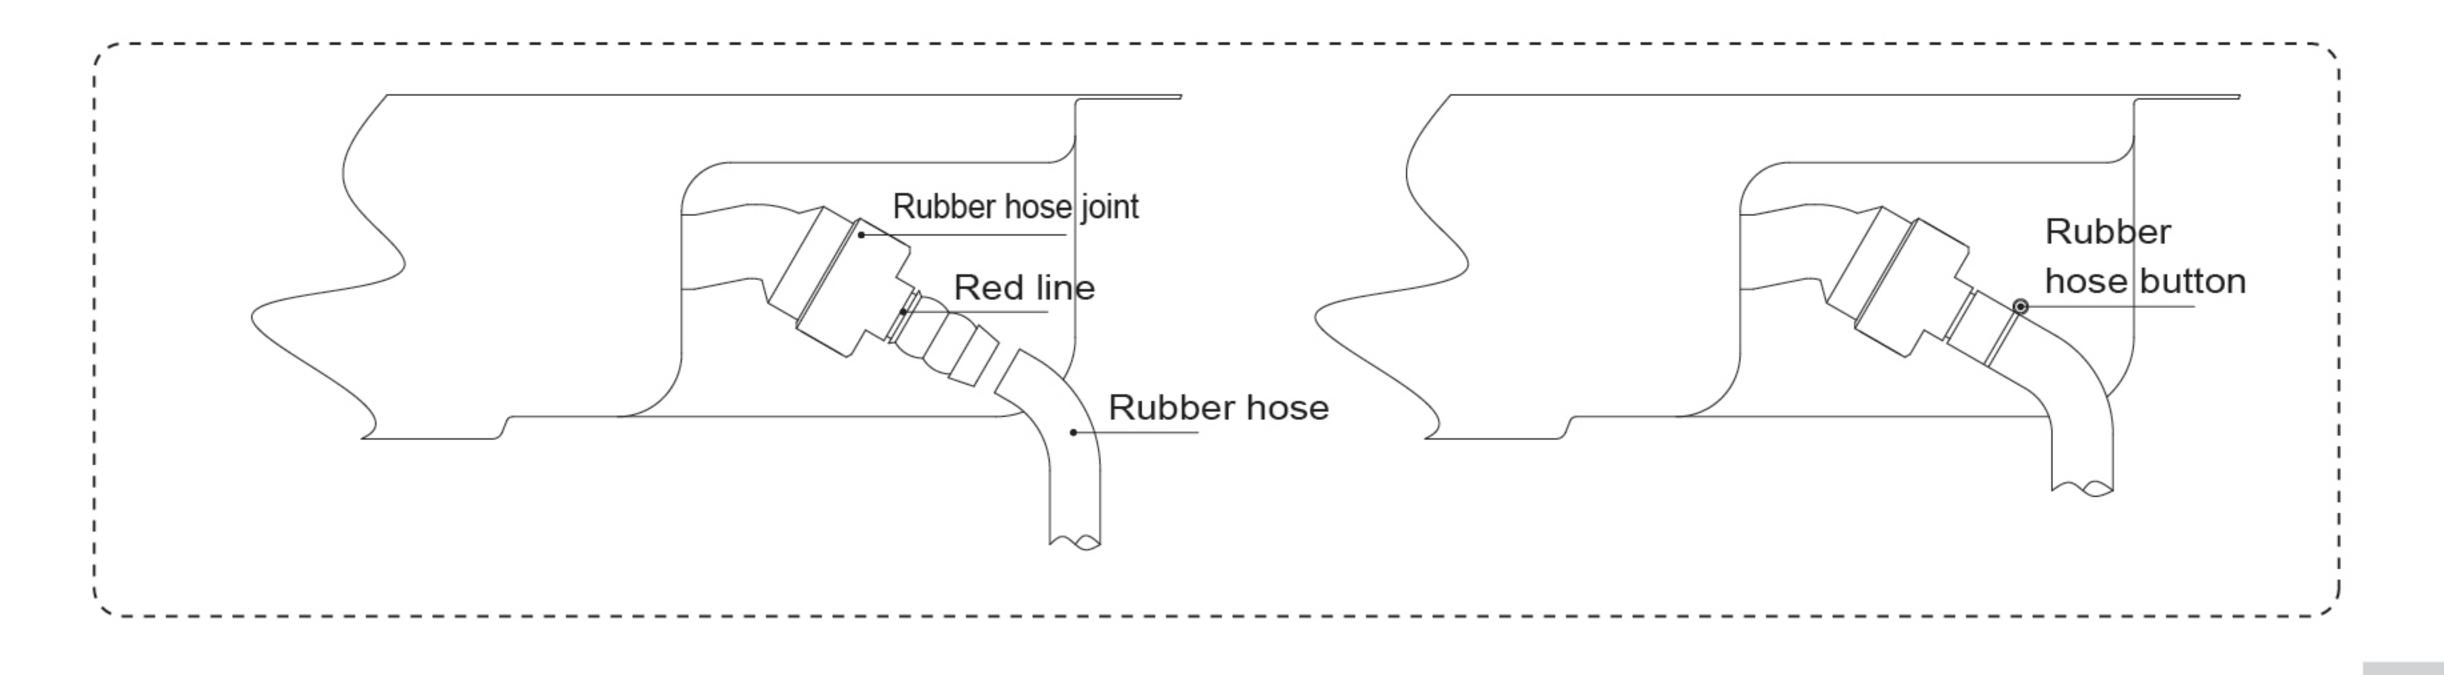

15