

SD1F-S2

Installation Diagram

DISHWASHER

SD1F-S2

BEFORE INSTALLATION REQUIREMENT:

1. Prepare a **13A power point**.
2. The outlet (drainage) pipe must be position vertically < 350mm of the floor, with ≥ 50 mm diameter pipe.
- ★ 3. The power point, incoming water tap & drainage pipe **MUST** be located inside the next adjacent compartment of the cabinet.
4. Table top cut-out size must be ready before installation.
5. Distance from cut-out to wall must be ≥ 70 mm.
- ★ 6. Installation type : Top Mount only
- ★ 7. If you have upper cabinet, ensure sufficient open space of ≥ 700 mm on the tabletop to allow the dishwasher to be positioned and inserted into the cut-out hole.
- ★ 8. If the gap between the countertop and upper cabinet is < 700 mm, install the dishwasher first, followed by the installation of the upper cabinet.

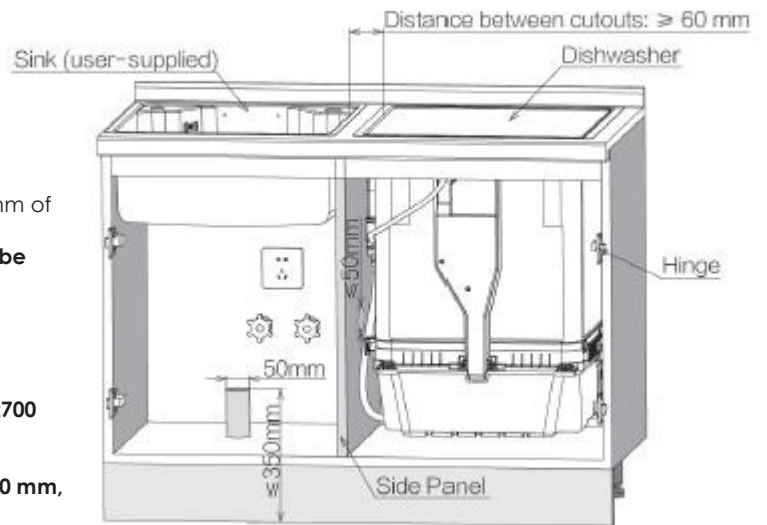


Figure3

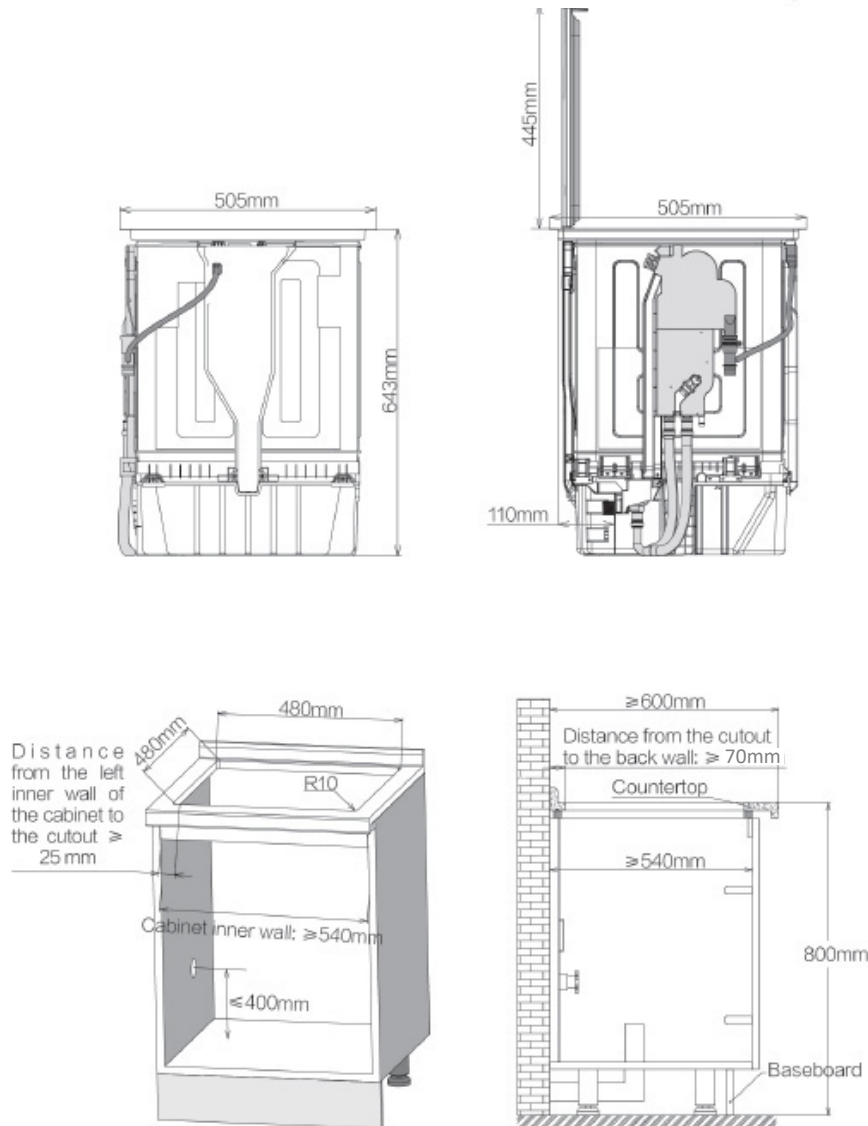


Figure1

Figure2