


SD1 F-S2



Dishwasher Pre-Installation Requirement

Installation Guide

1. Prepare a **13A power point**.
2. The outlet (drainage) pipe must be position vertically < 350mm of the floor, with ≥ 50mm diameter pipe.
- ★ **3. The power point, incoming water tap & drainage pipe MUST be located inside the next adjacent compartment of the cabinet.**
4. Table top cut-out size must be ready before installation.
5. Distance from cut-out to wall must be ≥70mm.
- ★ **6. Installation type : Top Mount only**
- ★ **7. If you have upper cabinet, ensure sufficient open space of ≥700 mm on the tabletop to allow the dishwasher to be positioned and inserted into the cut-out hole.**
- ★ **8. If the gap between the countertop and upper cabinet is <700 mm, install the dishwasher first, followed by the installation of the upper cabinet.**

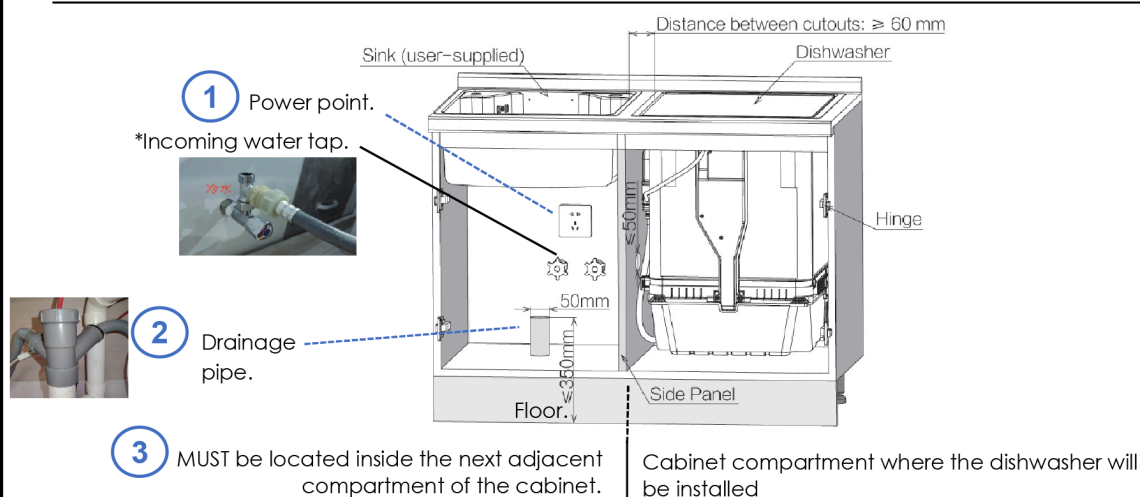

- 4 Table top cut-out size must be ready before installation.

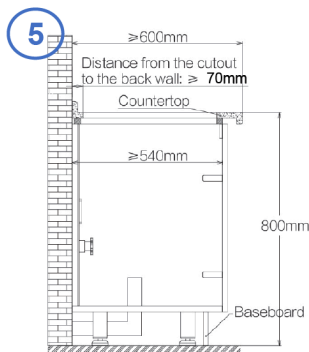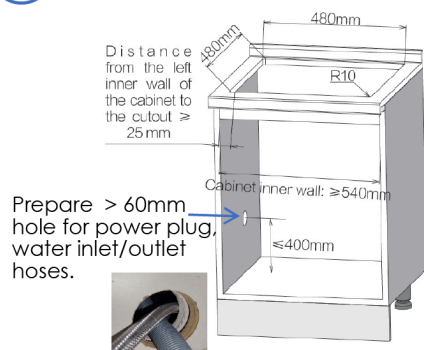

- 7 Ensure sufficient open space of ≥ 700 mm on the tabletop to allow the dishwasher to be positioned and inserted into the cut-out hole.



- 6 Installation type : Top Mount only

